

# Ezi-SERVO®


## Closed Loop Stepping System

- Miniaturized Compact Size
- Embedded Controller
- Position Table
- Closed Loop System
- No Gain Tuning / No Hunting
- High Resolution / Fast Response

**Plus-R  
MINI**




CE

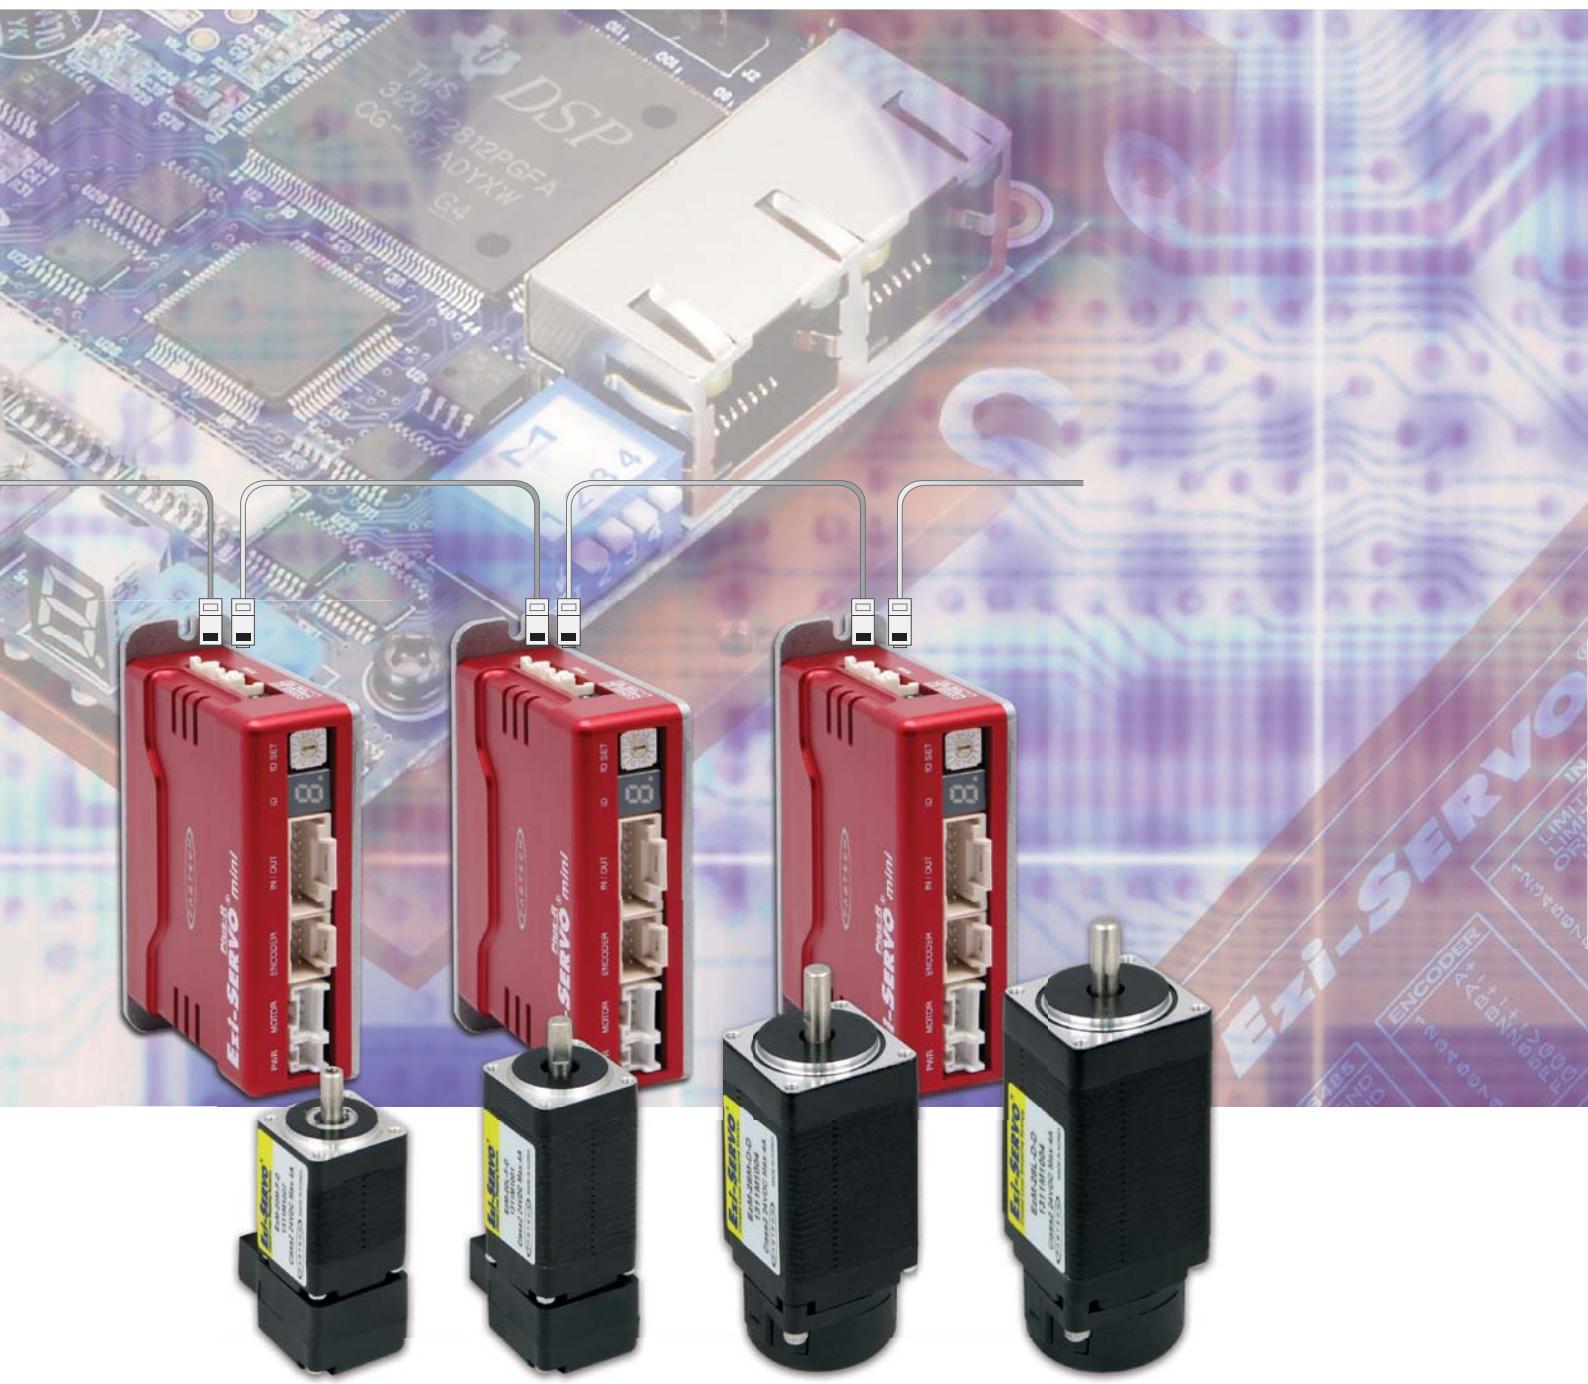

*Fast, Accurate, Smooth Motion*


# Ezi-SERVO®<sup>Plus-R</sup> MINI

## Closed Loop Stepping System

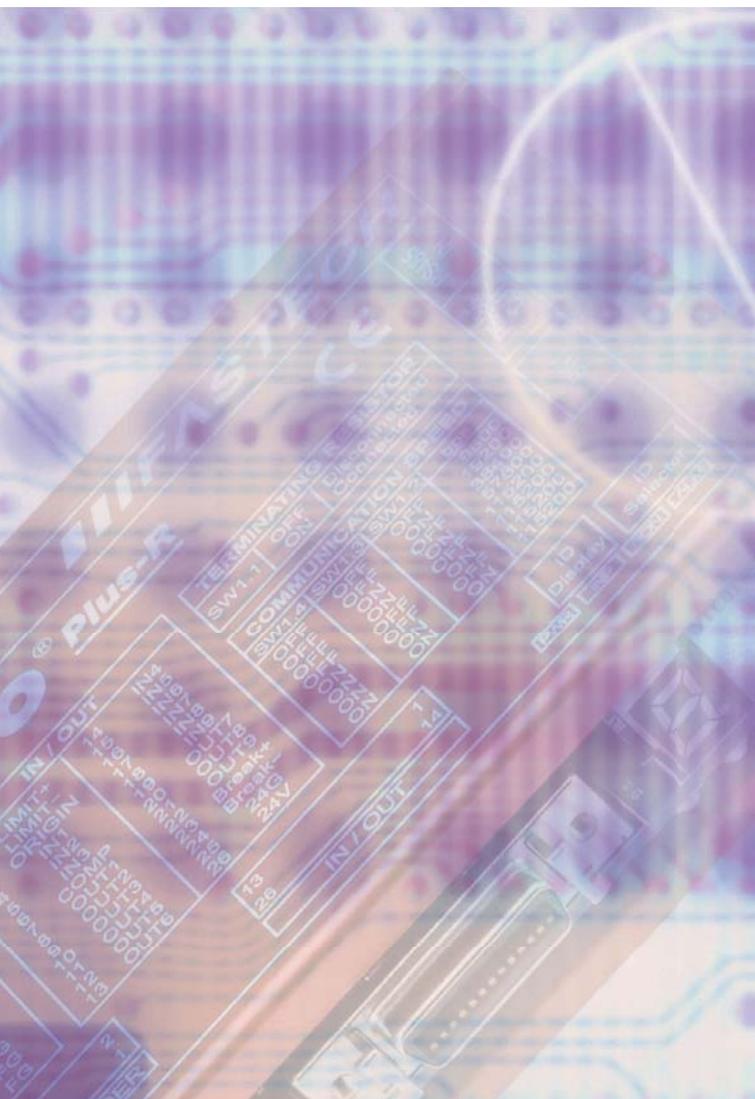

## 1 Network Based Motion Control

A maximum of 16 axis can be operated from a PC through RS-485 communications. All of the Motion conditions are set through the network and saved in Flash ROM as a parameter. Motion Library(DLL) is provided for programming under Windows 2000/XP.

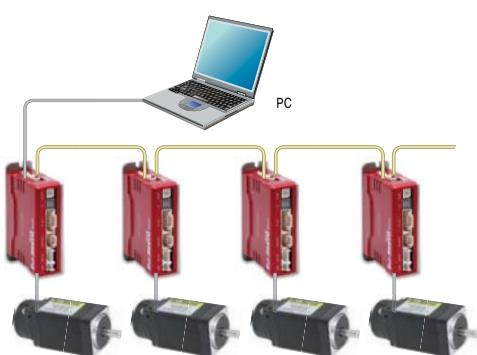

## 2 Position Table Function

Position Table can be used for motion control by digital input and output signals of host controller.


You can operate the motor directly by sending the position table number, start/stop, origin search and other digital input values from a PLC.

The PLC can monitor the In-Position, origin search, moving/stop, servo ready and other digital output signals from a drive. A maximum of 256 positioning points can be set from PLC.




## 3 Closed Loop System

Ezi-SERVO® is an innovative closed loop stepping motor and controller that utilizes a high-resolution motor mounted encoder to constantly monitor the motor shaft position. The encoder feedback feature allows the Ezi-SERVO® to update the current motor shaft position information every 25 microseconds. This allows the Ezi-SERVO® drive to compensate for the loss of position, ensuring accurate positioning. For example, due to a sudden load change, a conventional stepper motor and drive could lose a step creating a positioning error and a great deal of cost to the end user!

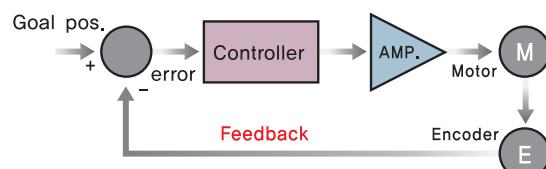

## 4 No Gain Tuning


Conventional servo systems, to ensure machine performance, smoothness, positional error and low servo noise, require the adjustment of its servo's gains as an initial crucial step. Even systems that employ auto-tuning require manual tweaking after the system is installed, especially if more than one axis are interdependent. Ezi-SERVO® employs the best characteristics of stepper and closed loop motion controls and algorithms to eliminate the need of tedious gain tuning required for conventional closed loop servo systems. This means that Ezi-SERVO® is optimized for the application and ready to work right out of the box! The Ezi-SERVO® system employs the unique characteristics of the closed loop stepping motor control, eliminating these cumbersome steps and giving the engineer a high performance servo system without wasting setup time. Ezi-SERVO® is especially well suited for low stiffness loads (for example, a belt and pulley system) that some-time require conventional servo systems to inertia match with the added expense and bulk of a gearbox. Ezi-SERVO® also performs exceptionally, even under heavy loads and high speeds!

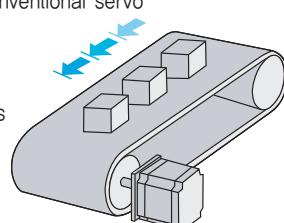

## 5

### No Hunting


Traditional servo motor drives overshoot their position and try to correct by overshooting the opposite direction, especially in high gain applications. This is called null hunt and is especially prevalent in systems that the break away or static friction is significantly higher than the running friction. The cure is lowering the gain, which affects accuracy or using Ezi-SERVO® Motion Control System! Ezi-SERVO® utilizes the unique characteristics of stepping motors and locks itself into the desired target position, eliminating Null Hunt. This feature is especially useful in applications such as nanotech manufacturing, semiconductor fabrication, vision systems and ink jet printing in which system oscillation and vibration could be a problem.

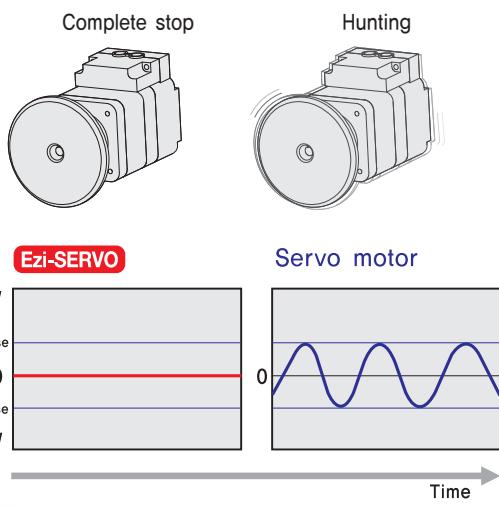

## 6

### Smooth and Accurate


Ezi-SERVO® is a high-precision servo drive, using a high-resolution encoder with 32,000 pulses/revolution. Unlike a conventional Microstep drive, the on-board high performance DSP (Digital Signal Processor) performs vector control and filtering, producing a smooth rotational control with minimum ripples.

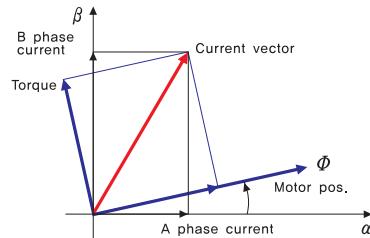

## 7

### Fast Response


Similar to conventional stepping motors, Ezi-SERVO® instantly synchronizes with command pulses providing fast positional response. Ezi-SERVO® is the optimum choice when zero-speed stability and rapid motions within a short distance are required. Traditional servo motor systems have a natural delay between the commanding input signals and the resultant motion because of the constant monitoring of the current position, necessitating in a waiting time until it settles, called settling time.

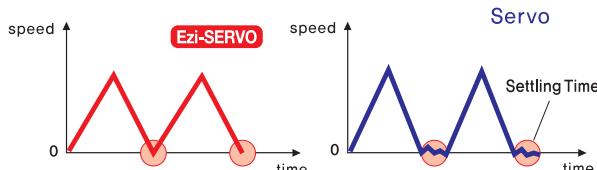

## 8

### High Resolution


The unit of the position command can be divided precisely. (Max. 32,000 pulses/revolution)

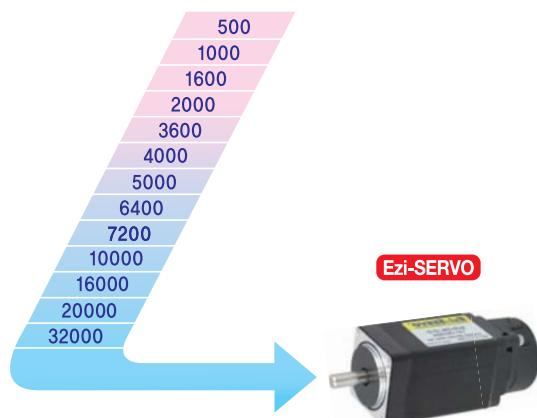

## 9

### High Torque


Compared with common step motors and drives, Ezi-SERVO® motion control systems can maintain a high torque state over relatively long period of time. This means that Ezi-SERVO continuously operates without loss of position under 100% of the load. Unlike conventional Microstep drives, Ezi-SERVO® exploits continuous high-torque operation during high-speed motion due to its innovative optimum current phase control.

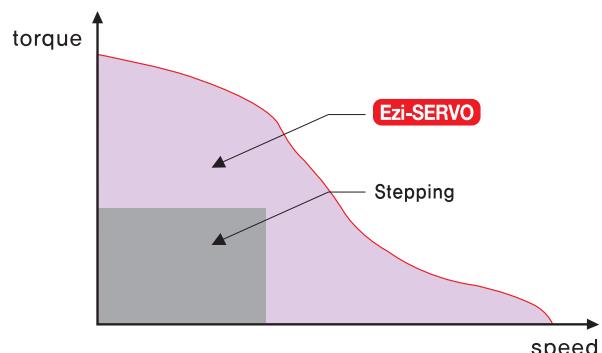

## 10

### High Speed


The Ezi-SERVO® functions well at high speed without the loss of Synchronism or positioning error. Ezi-SERVO®'s ability of continuous monitoring of current position enables the stepping motor to generate high-torque, even under a 100% load condition.

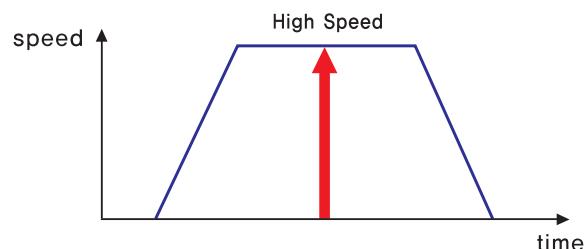

## ● Features of Motion Controller


### 1. Loop Count

This function allows positioning repeatedly according to the Loop Count Number.

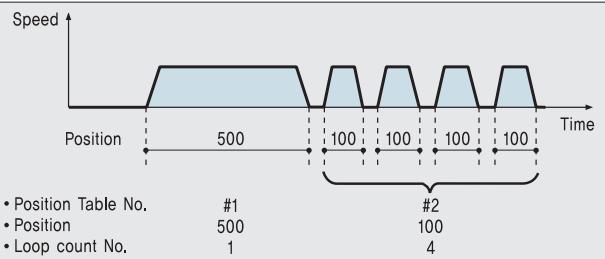


### 2. Acceleration/Deceleration

For quick acceleration and gradual deceleration, you can set each acceleration and deceleration time separately.

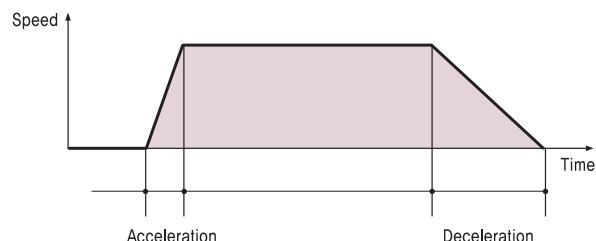


### 3. Pause

You can pause the motion upon the input of an external signal. When Pause signal change to OFF, the motor will restart to original target position.

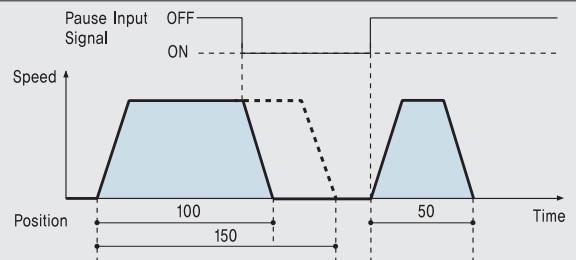


### 4. Alarm

The number of 7-Segment flashing time indicates which Alarm has occurred.

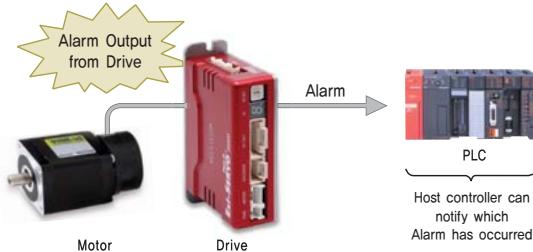

### 5. Teaching

Teaching signal is used to memorize current Position data into the selected Position Table item.


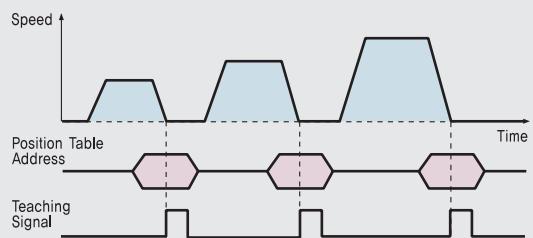


### 6. Jump


Within one Position Table, you can select various Position Table numbers that you want to jump. With three external input signal during movement, the next jump Position Table number can be select.

◆ Position Table #14

| Position | --- | Next | --- | Input 1 | Input 2 | Input 3 | --- |
|----------|-----|------|-----|---------|---------|---------|-----|
| 10000    |     | 100  |     | 115     | 116     | 117     |     |

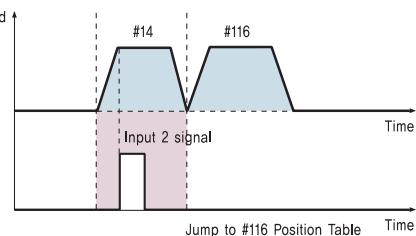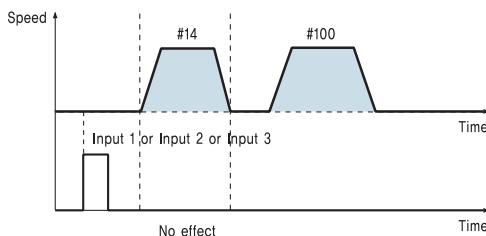

## ● Part Numbering

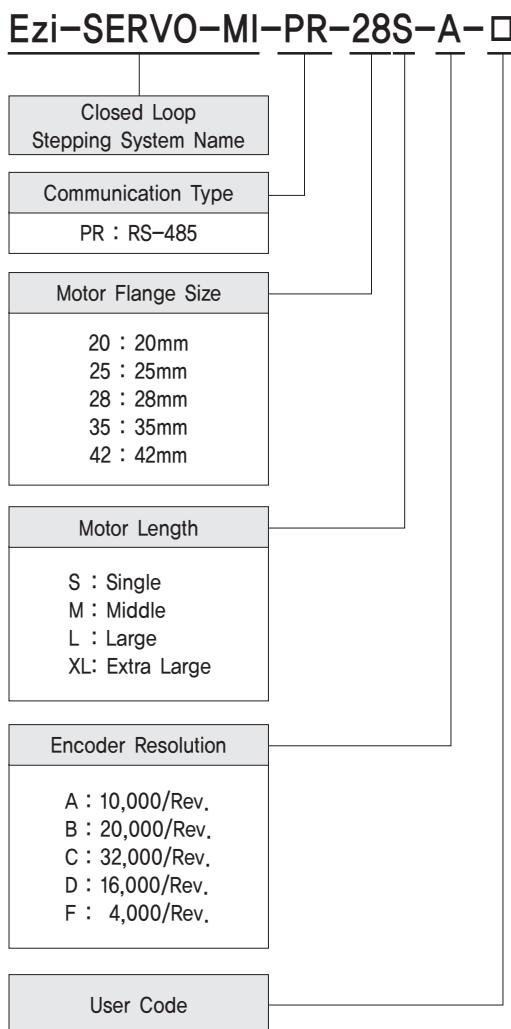

## ● Combination List of Ezi-SERVO Plus-R MINI

| Unit Part Number        | Motor Model Number | Drive Model Number |
|-------------------------|--------------------|--------------------|
| Ezi-SERVO-PR-MI-20M-F   | EzM-20M-F          | EzS-NDR-MI-20M-F   |
| Ezi-SERVO-PR-MI-20L-F   | EzM-20L-F          | EzS-NDR-MI-20L-F   |
| Ezi-SERVO-PR-MI-25S-F-L | EzM-25S-F-L        | EzS-NDR-MI-25S-F-L |
| Ezi-SERVO-PR-MI-25M-F-L | EzM-25M-F-L        | EzS-NDR-MI-25M-F-L |
| Ezi-SERVO-PR-MI-25L-F-L | EzM-25L-F-L        | EzS-NDR-MI-25L-F-L |
| Ezi-SERVO-PR-MI-28S-D   | EzM-28S-D          | EzS-NDR-MI-28S-D   |
| Ezi-SERVO-PR-MI-28M-D   | EzM-28M-D          | EzS-NDR-MI-28M-D   |
| Ezi-SERVO-PR-MI-28L-D   | EzM-28L-D          | EzS-NDR-MI-28L-D   |
| Ezi-SERVO-PR-MI-35S-D   | EzM-35S-D          | EzS-NDR-MI-35S-D   |
| Ezi-SERVO-PR-MI-35M-D   | EzM-35M-D          | EzS-NDR-MI-35M-D   |
| Ezi-SERVO-PR-MI-35L-D   | EzM-35L-D          | EzS-NDR-MI-35L-D   |
| Ezi-SERVO-PR-MI-35XL-D  | EzM-35XL-D         | EzS-NDR-MI-35XL-D  |
| Ezi-SERVO-PR-MI-42S-A   | EzM-42S-A          | EzS-NDR-MI-42S-A   |
| Ezi-SERVO-PR-MI-42S-B   | EzM-42S-B          | EzS-NDR-MI-42S-B   |
| Ezi-SERVO-PR-MI-42S-C   | EzM-42S-C          | EzS-NDR-MI-42S-C   |
| Ezi-SERVO-PR-MI-42M-A   | EzM-42M-A          | EzS-NDR-MI-42M-A   |
| Ezi-SERVO-PR-MI-42M-B   | EzM-42M-B          | EzS-NDR-MI-42M-B   |
| Ezi-SERVO-PR-MI-42M-C   | EzM-42M-C          | EzS-NDR-MI-42M-C   |
| Ezi-SERVO-PR-MI-42L-A   | EzM-42L-A          | EzS-NDR-MI-42L-A   |
| Ezi-SERVO-PR-MI-42L-B   | EzM-42L-B          | EzS-NDR-MI-42L-B   |
| Ezi-SERVO-PR-MI-42L-C   | EzM-42L-C          | EzS-NDR-MI-42L-C   |
| Ezi-SERVO-PR-MI-42XL-A  | EzM-42XL-A         | EzS-NDR-MI-42XL-A  |
| Ezi-SERVO-PR-MI-42XL-B  | EzM-42XL-B         | EzS-NDR-MI-42XL-B  |
| Ezi-SERVO-PR-MI-42XL-C  | EzM-42XL-C         | EzS-NDR-MI-42XL-C  |

## ● Advantages over Open-loop Control Stepping Drive

1. Reliable positioning without loss of synchronism.
2. Holding stable position and automatically recovering to the original position even after experiencing positioning error due to external forces, such as mechanical vibration or vertical positional holding.
3. Ezi-SERVO® utilizes 100% of the full range of rated motor torque, contrary to a conventional open-loop stepping driver that can use up to 50% of the rated motor torque due to the loss of synchronism.
4. Capability to operate at high speed due to load-dependant current control, open-loop stepper drivers use a constant current control at all speed ranges without considering load variations.


## ● Advantages over Servo Motor Controller

1. No gain tuning (Automatic adjustment of gain in response to a load change.)
2. Maintains the stable holding position without oscillation after completing positioning.
3. Fast positioning due to the independent control by on-board DSP.
4. Continuous operation during rapid short-stroke movement due to instantaneous positioning.

## ● Specifications

|                         |   |   |                      |                      |                      |  |
|-------------------------|---|---|----------------------|----------------------|----------------------|--|
| Motor Model             | EzM-20 series   | EzM-25 series   | EzM-28 series        | EzM-35 series        | EzM-42 series        |  |
| Driver Model            | EzS-NDR-MI-20 series  | EzS-NDR-MI-25 series  | EzS-NDR-MI-28 series | EzS-NDR-MI-35 series | EzS-NDR-MI-42 series |  |
| Input Voltage           | 24VDC ±10%  |   |                      |                      |                      |  |
| Control Method          | Closed loop control with 32bit DSP  |   |                      |                      |                      |  |
| Multi Axes Drive        | Maximum 16 axes through Daisy-Chain   |   |                      |                      |                      |  |
| Position Table          | 64 motion command steps (Continuous, Wait, Loop, Jump and External start etc.)                                      |   |                      |                      |                      |  |
| Current Consumption     | Max 500mA (Except motor current)  |   |                      |                      |                      |  |
| Operating Condition     | Ambient Temperature   | In Use : 0~50°C<br>In Storage : -20~70°C  |                      |                      |                      |  |
|                         | Humidity  | In Use : 35~85% (Non-condensing)<br>In Storage : 10~90% (Non-condensing)  |                      |                      |                      |  |
|                         | Vib. Resist.  | 0.5G  |                      |                      |                      |  |
| Function                | Rotation Speed  | 0~3,000rpm  |                      |                      |                      |  |
|                         | Resolution(P/R)   | 4,000/Rev. Encoder model : 500, 1,000, 1,600, 2,000, 3,600, 5,000, 6,400, 7,200, 10,000, 4,000<br>10,000/Rev. Encoder model : 500, 1,000, 1,600, 2,000, 3,600, 5,000, 6,400, 7,200, 10,000<br>16,000/Rev. Encoder model : 500, 1,000, 1,600, 2,000, 3,600, 5,000, 6,400, 7,200, 10,000, 16,000<br>20,000/Rev. Encoder model : 500, 1,000, 1,600, 2,000, 3,600, 5,000, 6,400, 7,200, 10,000, 20,000<br>32,000/Rev. Encoder model : 500, 1,000, 1,600, 2,000, 3,600, 5,000, 6,400, 7,200, 10,000, 32,000<br>(Selectable with Rotary switch) |                      |                      |                      |  |
|                         | Protection Functions  | Over Current Error, Over Speed Error, Position Tracking Error, Over Load Error, Over Temperature Error, Over Regenerated Voltage Error, Motor Connect Error, Encoder Connect Error, Motor Voltage Error, In-Position Error, System Error, ROM Error, Position Overflow Error  |                      |                      |                      |  |
|                         | In-Position Selection   | 0~15 (Selectable by parameter)  |                      |                      |                      |  |
|                         | Position Gain Selection   | 0~15 (Selectable by parameter)  |                      |                      |                      |  |
|                         | Rotational Direction  | CW / CCW (Selectable by parameter)  |                      |                      |                      |  |
| I/O Signal              | Input Signal  | 3 dedicated input (LIMIT+, LIMIT-, ORIGIN), 7 programmable input (Photocoupler)   |                      |                      |                      |  |
|                         | Output Signal   | 1 dedicated output (Compare Out), 1 programmable output (Photocoupler), Brake signal  |                      |                      |                      |  |
| Communication Interface | The RS-485 serial communication with PC<br>Transmission speed : 9,600~921,600bps                                    |   |                      |                      |                      |  |
| Position Control        | Incremental mode / Absolute mode<br>Data Range : -134,217,727 to +134,217,727pulse, Operating speed : Max, 3,000rpm |   |                      |                      |                      |  |
| Return to Origin        | Origin Sensor, Z phase, ±Limit sensor, Torque   |   |                      |                      |                      |  |
| GUI                     | User Interface Program within Windows   |   |                      |                      |                      |  |
| Software                | Motion Library (DLL) for windows 2000/XP  |   |                      |                      |                      |  |



## ● Drive Dimension [mm]

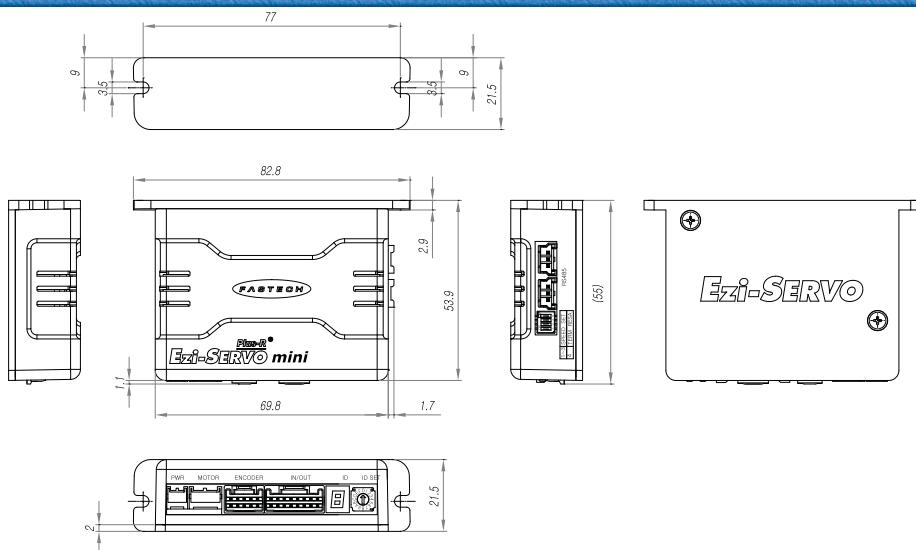

## ● Motor Specifications

| MODEL   | UNIT                | EzM-20M-F               | EzM-20L-F |
|---|---------------------|-------------------------|-----------|
| DRIVE METHOD  | ---                 | BI-POLAR                | BI-POLAR  |
| NUMBER OF PHASES  | ---                 | 2                       | 2         |
| VOLTAGE   | VDC                 | 2,9                     | 3,25      |
| CURRENT per PHASE                                       | A                   | 0,5                     | 0,5       |
| RESISTANCE per PHASE                                    | Ohm                 | 5,8                     | 6,5       |
| INDUCTANCE per PHASE                                    | mH                  | 2,5                     | 5,0       |
| HOLDING TORQUE  | N · m               | 0,013                   | 0,025     |
| ROTOR INERTIA   | g · cm <sup>2</sup> | 2,5                     | 5,0       |
| WEIGHTS   | g                   | 50                      | 80        |
| LENGTH (L)  | mm                  | 28                      | 38        |
| ALLOWABLE OVERHUNG LOAD<br>(DISTANCE FROM END OF SHAFT) | 3mm<br>8mm          | N                       | 18<br>30  |
| ALLOWABLE THRUST LOAD                                   | N                   | Lower than motor weight |           |
| INSULATION RESISTANCE                                   | MΩ                  | 100min. (at 500VDC)     |           |
| INSULATION CLASS  | ---                 | CLASS B (130°C)         |           |
| OPERATING TEMPERATURE                                   | °C                  | 0 to 55                 |           |

## ● Motor Dimension [mm] and Torque Characteristics

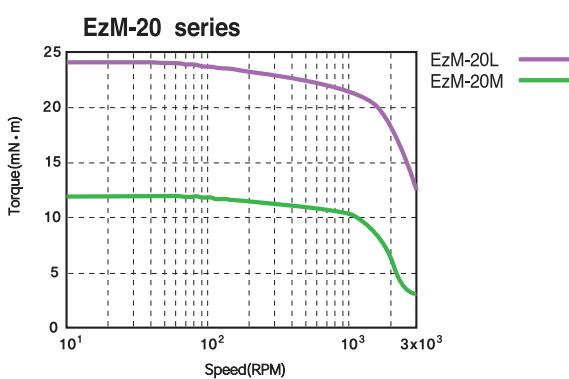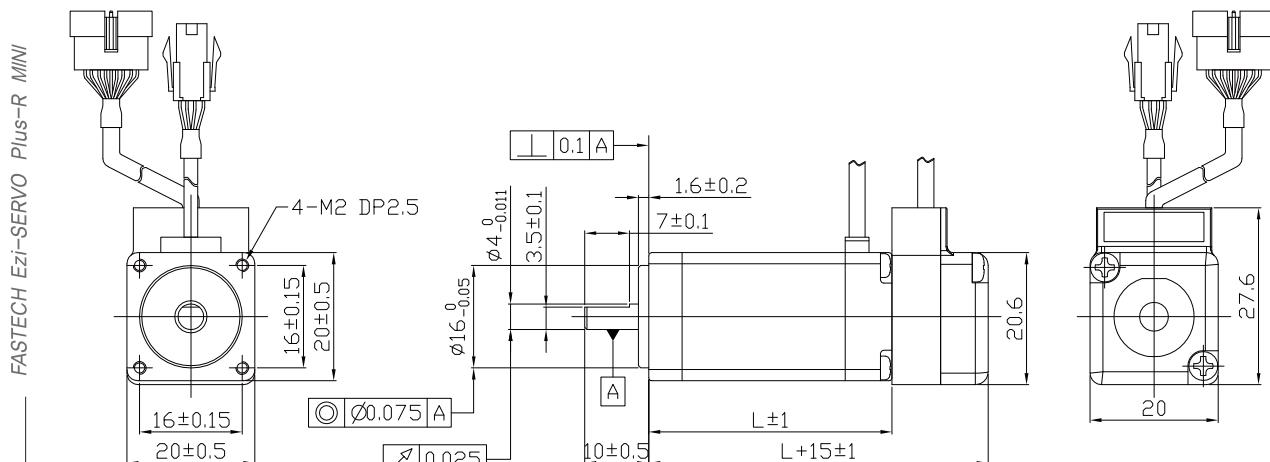

※ Measured Condition

Motor Voltage = 24VDC

Motor Current = Rated Current (Refer to Motor Specification)


Drive = Ezi-SERVO Plus-R MINI

# Low Vibration 25

## ● Motor Specifications

| M O D E L   |                     | UNIT                    | EzM-25S-F-L | EzM-25M-F-L | EzM-25L-F-L |
|---|---------------------|-------------------------|-------------|-------------|-------------|
| DRIVE METHOD  | ---                 | BI-POLAR                | BI-POLAR    | BI-POLAR    | BI-POLAR    |
| NUMBER OF PHASES  | ---                 | 2                       | 2           | 2           | 2           |
| VOLTAGE   | VDC                 | 2,66                    | 9,87        | 3,654       |             |
| CURRENT per PHASE                                       | A                   | 0,7                     | 0,21        | 0,63        |             |
| RESISTANCE per PHASE                                    | Ohm                 | 3,8                     | 47          | 5,8         |             |
| INDUCTANCE per PHASE                                    | mH                  | 2,0                     | 30          | 5,4         |             |
| HOLDING TORQUE  | N · m               | 0,033                   | 0,049       | 0,062       |             |
| ROTOR INERTIA   | g · cm <sup>2</sup> | 2                       | 3           | 7           |             |
| WEIGHTS   | g                   | 85                      | 100         | 120         |             |
| LENGTH (L)  | mm                  | 23,5                    | 27,5        | 33          |             |
| ALLOWABLE OVERHUNG LOAD<br>(DISTANCE FROM END OF SHAFT) | 3mm<br>8mm          | N                       | 30<br>38    | 30<br>38    | 30<br>38    |
| ALLOWABLE THRUST LOAD                                   | N                   | Lower than motor weight |             |             |             |
| INSULATION RESISTANCE                                   | MΩ                  | 100min. (at 500VDC)     |             |             |             |
| INSULATION CLASS  | ---                 | CLASS B (130°C)         |             |             |             |
| OPERATING TEMPERATURE                                   | °C                  | 0 to 55                 |             |             |             |



## ● Motor Dimension [mm] and Torque Characteristics

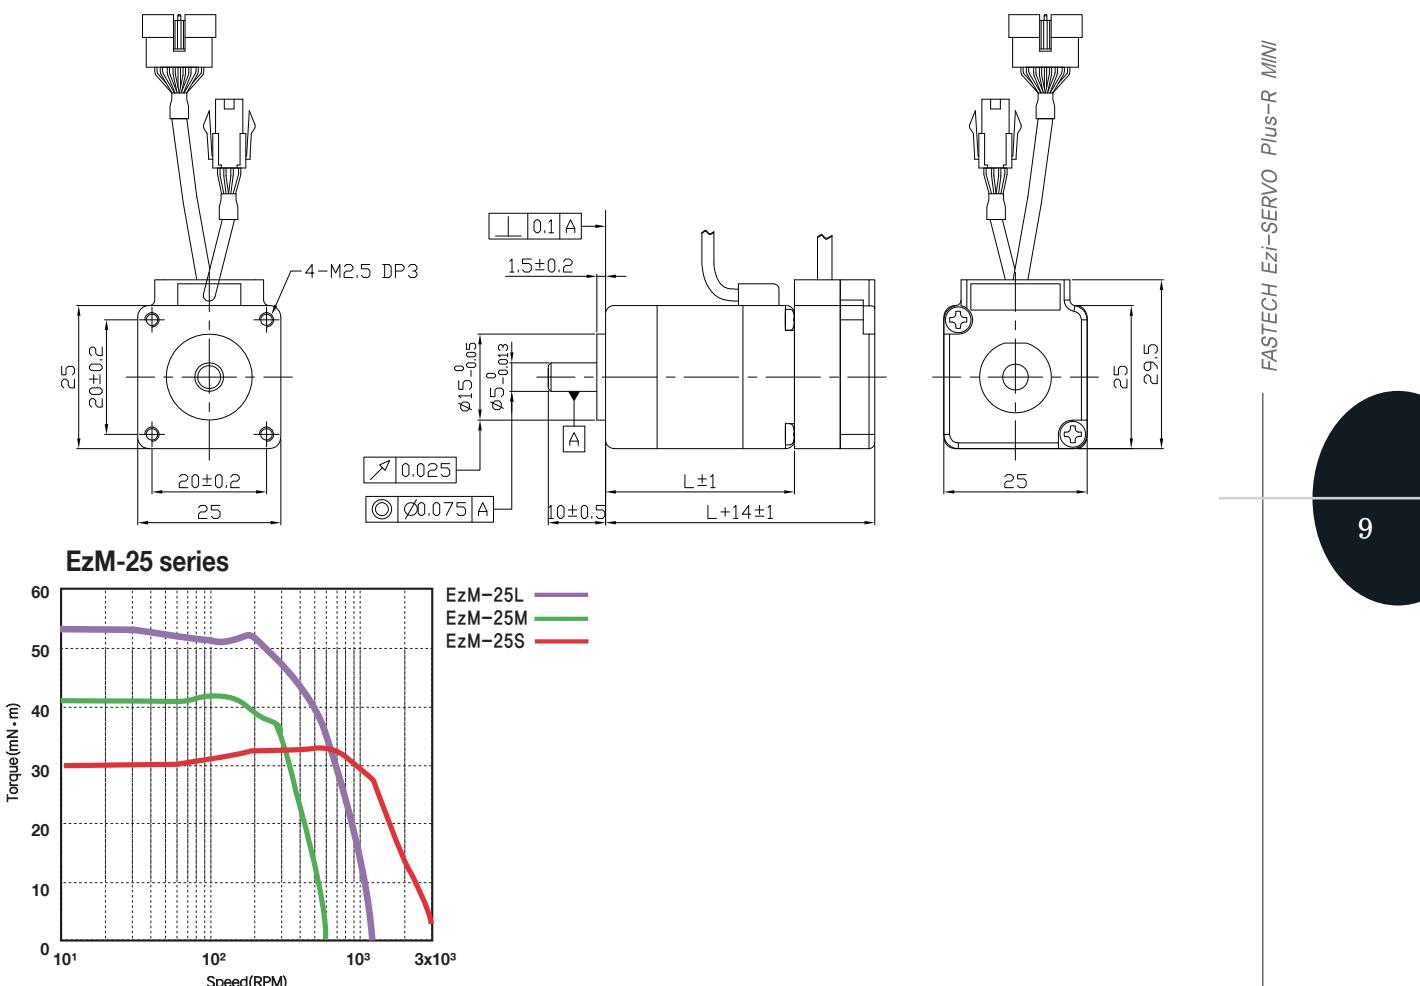

## ● Motor Specifications

| M O D E L  |                     | UNIT     | EzM-28S-D               | EzM-28M-D      | EzM-28L-D      |
|--|---------------------|----------|-------------------------|----------------|----------------|
| DRIVE METHOD   | ----                | BI-POLAR | BI-POLAR                | BI-POLAR       | BI-POLAR       |
| NUMBER OF PHASES   | ----                | 2        | 2                       | 2              | 2              |
| VOLTAGE  | VDC                 | 3.04     | 3.04                    | 3.42           |                |
| CURRENT per PHASE  | A                   | 0.95     | 0.95                    | 0.95           |                |
| RESISTANCE per PHASE                                       | Ohm                 | 3,2      | 3,2                     | 3,6            |                |
| INDUCTANCE per PHASE                                       | mH                  | 2        | 5                       | 5,8            |                |
| HOLDING TORQUE   | N · m               | 0,065    | 0,08                    | 0,11           |                |
| ROTOR INERTIA  | g · cm <sup>2</sup> | 9        | 13                      | 18             |                |
| WEIGHTS  | g                   | 110      | 140                     | 200            |                |
| LENGTH (L)   | mm                  | 32       | 45                      | 52             |                |
| ALLOWABLE OVERHUNG<br>LOAD (DISTANCE FROM<br>END OF SHAFT) | 3mm<br>8mm<br>13mm  | N        | 30<br>38<br>53          | 30<br>38<br>53 | 30<br>38<br>53 |
| ALLOWABLE THRUST LOAD                                      | N                   |          | Lower than motor weight |                |                |
| INSULATION RESISTANCE                                      | MΩ                  |          | 100min. (at 500VDC)     |                |                |
| INSULATION CLASS   | ----                |          | CLASS B (130°C)         |                |                |
| OPERATING TEMPERATURE                                      | °C                  |          | 0 to 55                 |                |                |

## ● Motor Dimension [mm] and Torque Characteristics

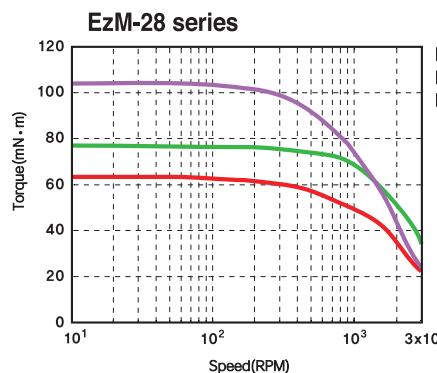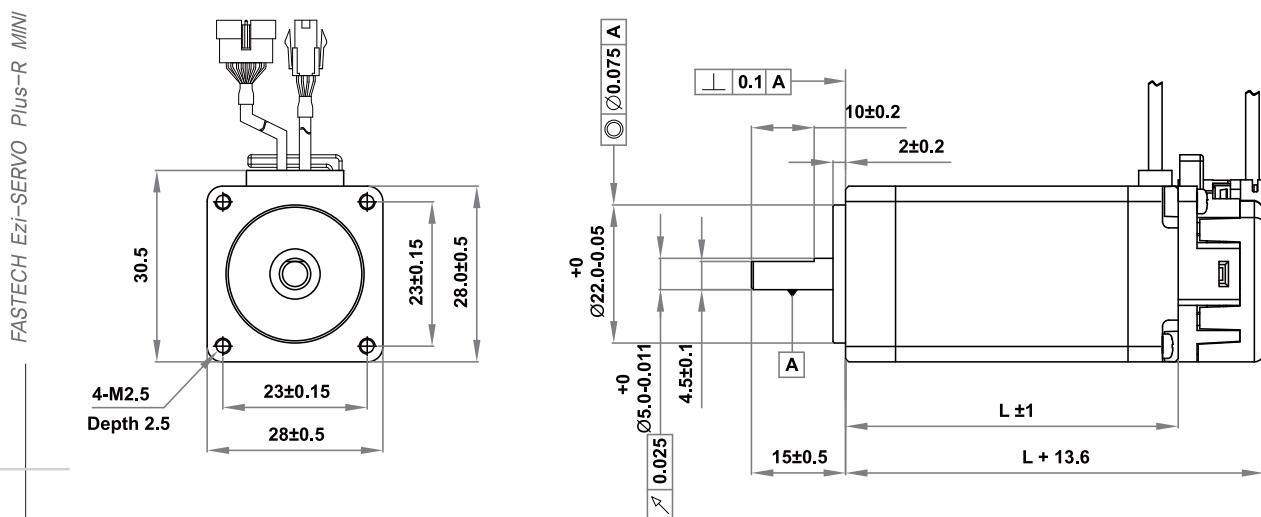

※ Measured Condition

Motor Voltage = 24VDC



Motor Current = Rated Current (Refer to Motor Specification)

Drive = Ezi-SERVO Plus-R MINI

## ● Motor Specifications

| M O D E L  | UNIT                       | EzM-35S-D               | EzM-35M-D | EzM-35L-D | EzM-35XL-D |
|--|----------------------------|-------------------------|-----------|-----------|------------|
| DRIVE METHOD   | ---                        | BI-POLAR                | BI-POLAR  | BI-POLAR  | BI-POLAR   |
| NUMBER OF PHASES                                     | ---                        | 2                       | 2         | 2         | 2          |
| VOLTAGE  | VDC                        | 2,28                    | 2,88      | 4,59      | 5,39       |
| CURRENT per PHASE                                    | A                          | 0,6                     | 0,6       | 0,85      | 0,7        |
| RESISTANCE per PHASE                                 | Ohm                        | 3,8                     | 4,8       | 5,4       | 7,7        |
| INDUCTANCE per PHASE                                 | mH                         | 3,2                     | 6,1       | 6,5       | 8,4        |
| HOLDING TORQUE                                       | N · m                      | 0,034                   | 0,050     | 0,176     | 0,225      |
| ROTOR INERTIA  | g · cm <sup>2</sup>        | 5                       | 8         | 11        | 32         |
| WEIGHTS  | g                          | 165                     | 180       | 260       | 360        |
| LENGTH (L)   | mm                         | 22                      | 26        | 38        | 53         |
| ALLOWABLE OVERHUNG LOAD (DISTANCE FROM END OF SHAFT) | 3mm<br>8mm<br>13mm<br>18mm | N                       | 22        | 22        | 22         |
|  |                            |                         | 26        | 26        | 26         |
|  |                            |                         | 33        | 33        | 33         |
|  |                            |                         | 46        | 46        | 46         |
| ALLOWABLE THRUST LOAD                                | N                          | Lower than motor weight |           |           |            |
| INSULATION RESISTANCE                                | MΩ                         | 100min. (at 500VDC)     |           |           |            |
| INSULATION CLASS                                     | ---                        | CLASS B (130°C)         |           |           |            |
| OPERATING TEMPERATURE                                | °C                         | 0 to 55                 |           |           |            |

## ● Motor Dimension [mm] and Torque Characteristics

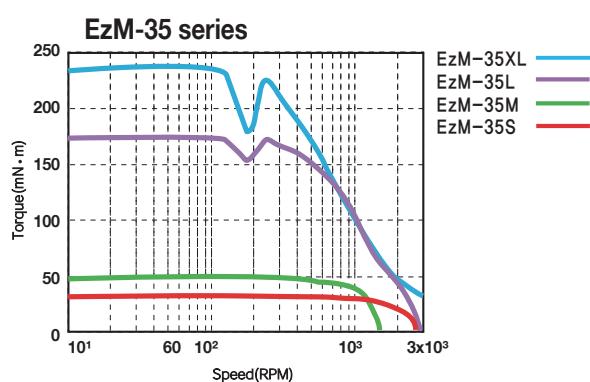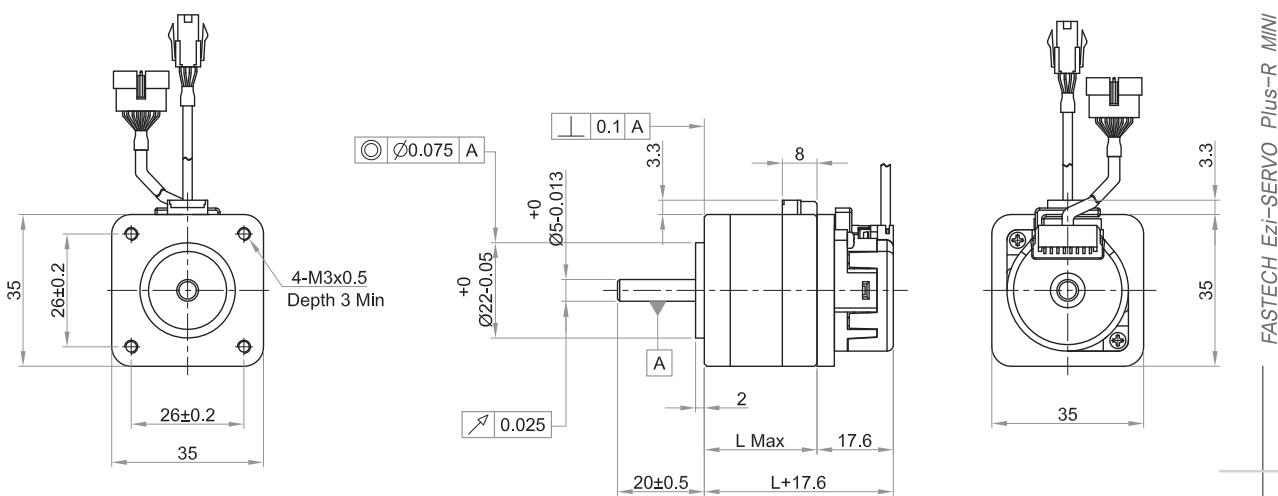

※ Measured Condition

Motor Voltage = 24VDC



Motor Current = Rated Current (Refer to Motor Specification)

Drive = EzI-SERVO Plus-R MINI

## ● Motor Specifications

| M O D E L   |                            | UNIT     | EzM-42S-A<br>EzM-42S-B<br>EzM-42S-C | EzM-42M-A<br>EzM-42M-B<br>EzM-42M-C | EzM-42L-A<br>EzM-42L-B<br>EzM-42L-C | EzM-42XL-A<br>EzM-42XL-B<br>EzM-42XL-C |
|---|----------------------------|----------|-------------------------------------|-------------------------------------|-------------------------------------|--|
| DRIVE METHOD  | ----                       | BI-POLAR | BI-POLAR                            | BI-POLAR                            | BI-POLAR                            | BI-POLAR                               |
| NUMBER OF PHASES  | ----                       | 2        | 2                                   | 2                                   | 2                                   | 2                                      |
| VOLTAGE   | VDC                        | 3.36     | 4.32                                | 4.56                                | 7.2                                 |  |
| CURRENT per PHASE   | A                          | 1.2      | 1.2                                 | 1.2                                 | 1.2                                 | 1.2                                    |
| RESISTANCE per PHASE  | Ohm                        | 2.8      | 3.6                                 | 3.8                                 | 6.0                                 |  |
| INDUCTANCE per PHASE  | mH                         | 2.5      | 7.2                                 | 8.0                                 | 15.6                                |  |
| HOLDING TORQUE  | N · m                      | 0.32     | 0.44                                | 0.5                                 | 0.65                                |  |
| ROTOR INERTIA   | g · cm <sup>2</sup>        | 35       | 54                                  | 77                                  | 114                                 |  |
| WEIGHTS   | g                          | 220      | 280                                 | 350                                 | 500                                 |  |
| LENGTH (L)  | mm                         | 33       | 39                                  | 47                                  | 59                                  |  |
| ALLOWABLE<br>OVERHUNG LOAD<br>(DISTANCE FROM<br>END OF SHAFT) | 3mm<br>8mm<br>13mm<br>18mm | N        | 22<br>26<br>33<br>46                | 22<br>26<br>33<br>46                | 22<br>26<br>33<br>46                | 22<br>26<br>33<br>46                   |
| ALLOWABLE THRUST LOAD   | N                          |          |                                     | Lower than motor weight             |                                     |  |
| INSULATION RESISTANCE   | MΩhm                       |          |                                     | 100min. (at 500VDC)                 |                                     |  |
| INSULATION CLASS  | ----                       |          |                                     | CLASS B (130°C)                     |                                     |  |
| OPERATING TEMPERATURE   | °C                         |          |                                     | 0 to 55                             |                                     |  |

## ● Motor Dimension [mm] and Torque Characteristics

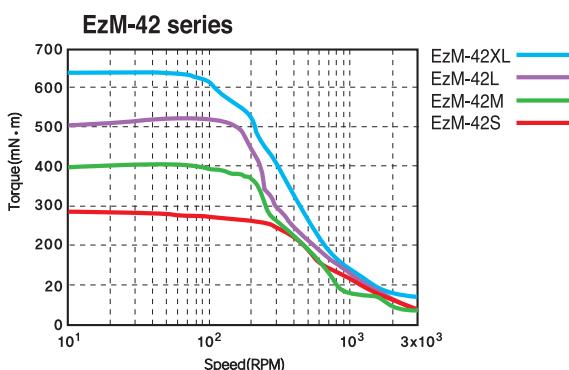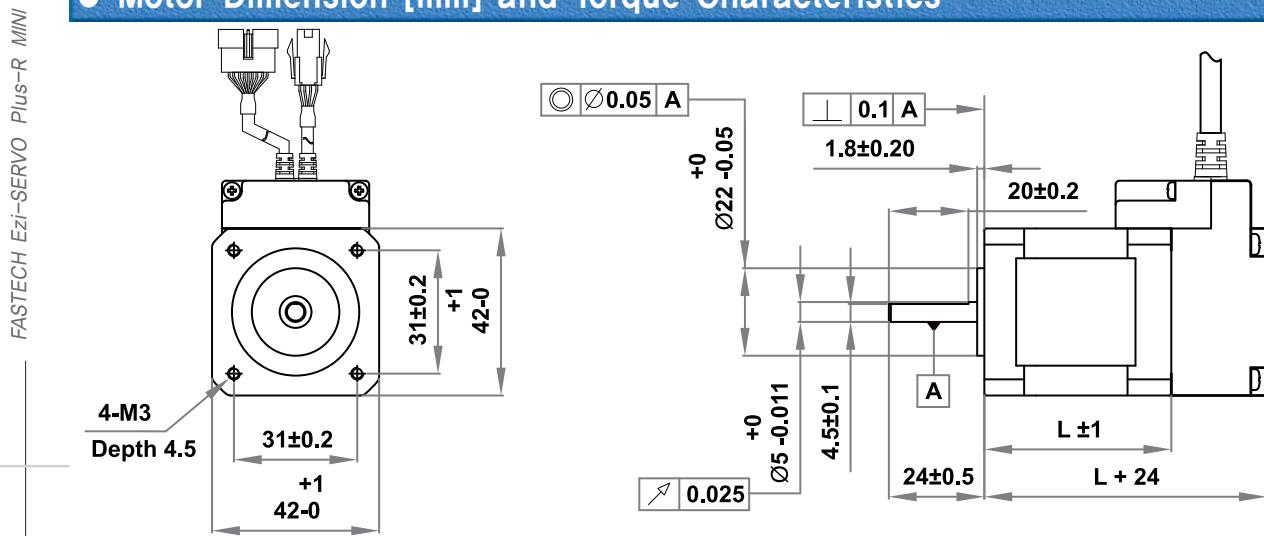


※ Measured Condition

Motor Voltage = 24VDC

Motor Current = Rated Current (Refer to Motor Specification)


Drive = Ez-i-SERVO Plus-R MINI

## ● Setting and Operating

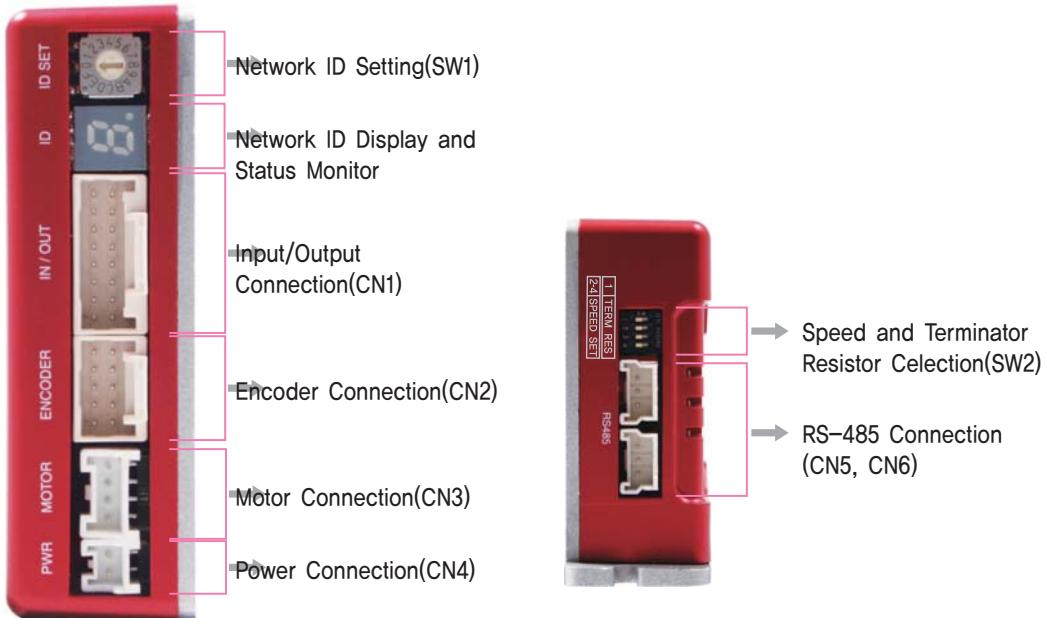

### 1. Protection Function and 7-Segment Flash Times

| Times | Protection                 | Conditions   |
|-------|----------------------------|--|
| 1     | Over current               | The current through power devices in inverter exceeds the limit value                        |
| 2     | Over speed                 | Motor speed exceed 3,000rpm  |
| 3     | Position tracking error    | Position error value is higher than 90° in motor run state*1                                 |
| 4     | Over load                  | The motor is continuously operated more than 5 second under a load exceeding the max. torque |
| 5     | Over temperature           | Inside temperature of drive exceeds 85°C   |
| 6     | Over regeneratived voltage | Back-EMF more than 50V   |
| 7     | Motor connect error        | The power is ON without connection of the motor cable to drive                               |
| 8     | Encoder connect error      | Cable connection error with Encoder connector in drive                                       |
| 9     | Motor voltage error        | Motor voltage is less than 20V   |
| 10    | In-Position error          | After operation is finished, a position error occurs   |
| 11    | System error               | Error occurs in drive system   |
| 12    | ROM error                  | Error occurs in parameter storage device(ROM)  |
| 15    | Position overflow error    | Position error value is higher than 90° in motor stop state*1                                |

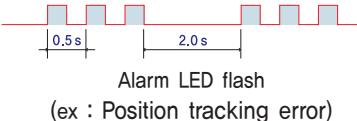

\*1 : 주어진 값은 파라미터에 의해 변경 가능합니다. (메뉴얼 참조)

### 2. Network ID Selection Switch(SW1)

| Position | ID number | Position | ID number |
|----------|-----------|----------|-----------|
| 0        | 0         | 8        | 8         |
| 1        | 1         | 9        | 9         |
| 2        | 2         | A        | 10        |
| 3        | 3         | B        | 11        |
| 4        | 4         | C        | 12        |
| 5        | 5         | D        | 13        |
| 6        | 6         | E        | 14        |
| 7        | 7         | F        | 15        |

※Maximum 16 axis can be connected in one network.

### 3. Motor Connector(CN3)

| NO. | Function |
|-----|----------|
| 1   | B Phase  |
| 2   | /B Phase |
| 3   | /A Phase |
| 4   | A Phase  |



### 4. Speed and Terminator Resistor Selection Switch(SW2)

The purpose of this is to setting the communication speed and connect a terminator resistor if drive is installed at the end of network.

SW 2.1 used for connecting the terminator resistor,  
SW 2.2~SW 2.4 used for setting speed as follows.

| SW 2.1 | SW 2.2 | SW 2.3 | SW 2.4 | Baud rate[bps] |
|--------|--------|--------|--------|----------------|
| -      | OFF    | OFF    | OFF    | 9,600          |
| -      | ON     | OFF    | OFF    | 19,200         |
| -      | OFF    | ON     | OFF    | 38,400         |
| -      | ON     | ON     | OFF    | 57,600         |
| -      | OFF    | OFF    | ON     | 115,200*1      |
| -      | ON     | OFF    | ON     | 230,400        |
| -      | OFF    | ON     | ON     | 460,800        |
| -      | ON     | ON     | ON     | 921,600        |


\*1 : Default setting value

If SW2.1 is OFF, terminator resistor is disconnected.  
If SW2.2 is ON, terminator resistor is connected.




## 5. Input/Output Signal(CN1)

| NO. | Function      | I/O    |
|-----|---------------|--------|
| 1   | 24VDC         | Input  |
| 2   | 24VDC GND     | Input  |
| 3   | BRAKE+        | Output |
| 4   | BRAKE-        | Output |
| 5   | +Limit Sensor | Input  |
| 6   | -Limit Sensor | Input  |
| 7   | Origin Sensor | Input  |
| 8   | Digital IN 1  | Input  |
| 9   | Digital IN 2  | Input  |
| 10  | Digital IN 3  | Input  |
| 11  | Digital IN 4  | Input  |
| 12  | Digital IN 5  | Input  |
| 13  | Digital IN 6  | Input  |
| 14  | Digital IN 7  | Input  |
| 15  | Compare Out   | Output |
| 16  | Digital OUT 1 | Output |

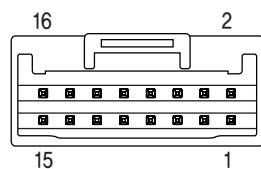


## 6. Encoder Connector(CN2)

| NO. | Function  | I/O    |
|-----|-----------|--------|
| 1   | A+        | Input  |
| 2   | A-        | Input  |
| 3   | B+        | Input  |
| 4   | B-        | Input  |
| 5   | Z+        | Input  |
| 6   | Z-        | Input  |
| 7   | 5VDC      | Output |
| 8   | 5VDC GND  | Output |
| 9   | Frame GND | ----   |
| 10  | Frame GND | ----   |



## 7. Power Connector(CN4)


| NO. | Function         |
|-----|------------------|
| 1   | 24VDC $\pm 10\%$ |
| 2   | GND              |




## 8. RS-485 Communication Connector(CN5, CN6)

RS-485 Communication Port to connect with Host Controller.

| NO. | Function |
|-----|----------|
| 1   | +DATA    |
| 2   | -DATA    |
| 3   | GND      |



## ● System Configuration

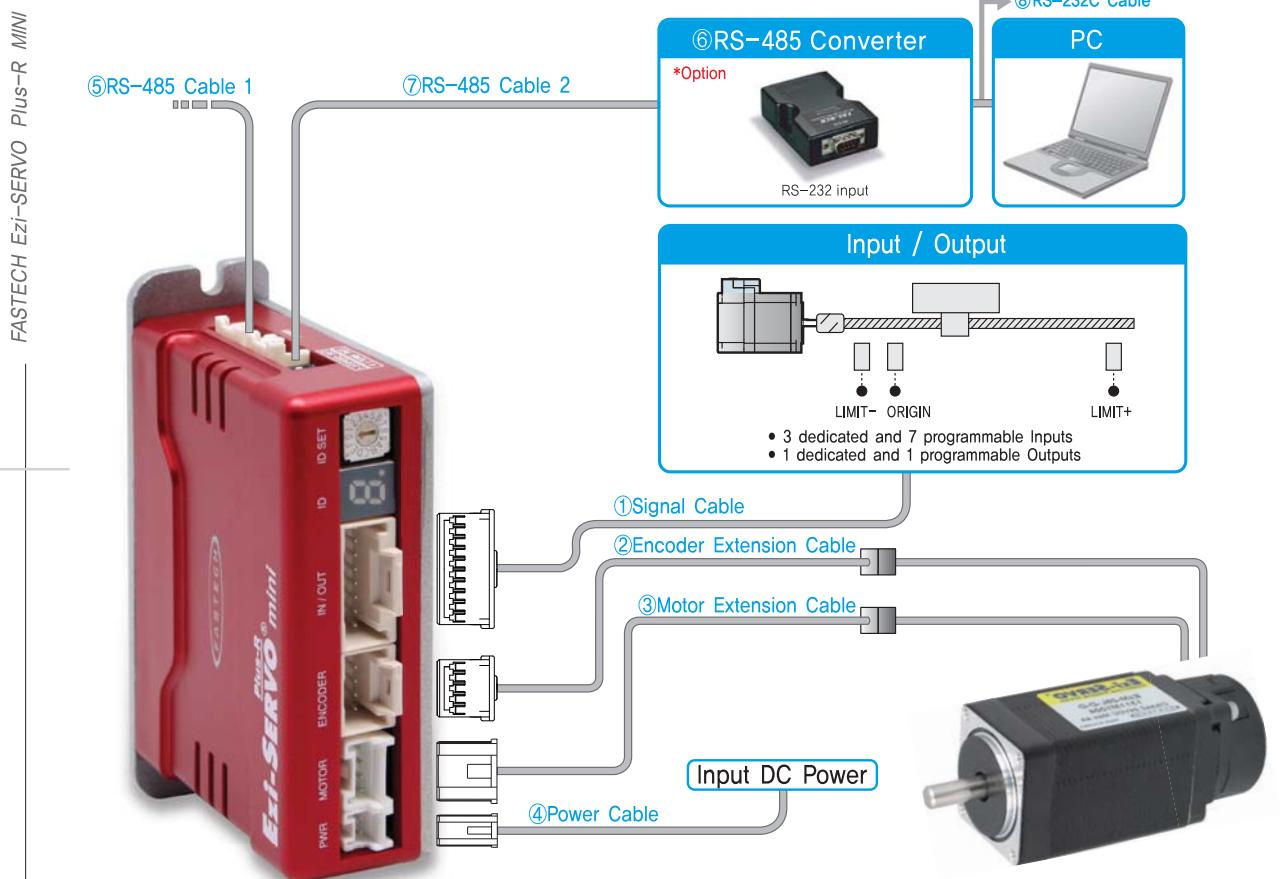

| Type            | Signal Cable | Encoder Cable | Motor Cable | Power Cable | RS-485 Cable |
|-----------------|--------------|---------------|-------------|-------------|--------------|
| Standard Length | —            | 30cm          | 30cm        | —           | —            |
| Max. Length     | 20m          | 20m           | 20m         | 2m          | 30m          |

## 1. Cable Option

### ① Signal Cable

Available to connect between Control System and Ezi-SERVO Plus-R MINI.

| Item        | Length[m] | Remark       |
|-------------|-----------|--------------|
| CSVA-S-□□□F | □□□       | Normal Cable |
| CSVA-S-□□□M | □□□       | Robot Cable  |

□ is for Cable Length. The unit is 1m and Max. 20m length.

### ② Encoder Extension Cable

Available to extended connection between Encoder and Ezi-SERVO Plus-R MINI.

| Item       | Length[m] | Remark       |
|------------|-----------|--------------|
| CSV-E-□□□F | □□□       | Normal Cable |
| CSV-E-□□□M | □□□       | Robot Cable  |

□ is for Cable Length. The unit is 1m and Max. 20m length.

### ③ Motor Extension Cable

Available to Extended connection between motor and Ezi-SERVO Plus-R MINI.

| Item       | Length[m] | Remark       |
|------------|-----------|--------------|
| CMB-M-□□□F | □□□       | Normal Cable |
| CMB-M-□□□M | □□□       | Robot Cable  |

□ is for Cable Length. The unit is 1m and Max. 20m length.

### ④ Power Cable

Available to connect between Power and Ezi-SERVO Plus-R MINI.

| Item        | Length[m] | Remark       |
|-------------|-----------|--------------|
| CMNB-P-□□□F | □□□       | Normal Cable |
| CMNB-P-□□□M | □□□       | Robot Cable  |

□ is for Cable Length. The unit is 1m and Max. 2m length.

### ⑤ RS-485 Cable 2

| Item        | Length[m] | Remark       |
|-------------|-----------|--------------|
| CGNB-R-0R6F | 0,6       | Normal Cable |
| CGNB-R-001F | 1         |              |
| CGNB-R-1R5F | 1,5       |              |
| CGNB-R-002F | 2         |              |
| CGNB-R-003F | 3         |              |
| CGNB-R-005F | 5         |              |

\*Common cable to connect Ezi-SERVO ALL, Ezi-STEP ALL, Ezi-MotionLink and Ezi-SERVO Plus-R MINI thru by Network.

## 2. Option

### ⑥ FAS-RCR(RS-232C to RS-485 Converter)

| Item           | Specification                                    |
|----------------|--|
| Comm. Speed    | Max. 115,2Kbps                                   |
| Comm. Distance | RS-232C : Max. 15m<br>RS-485 : Max. 1,2km        |
| Connector Type | RS-232C : DB9 Female<br>RS-485 : RJ-45           |
| Dimension      | 50X75X23mm                                       |
| Weight         | 38g  |
| Power          | Powered from PC<br>(Usable for external DC5~24V) |

### ⑦ RS-485 Cable 1

(FAS-RCR to Ezi-SERVO ALL, FAS-RCR to Ezi-STEP ALL, FAS-RCR to Ezi-SERVO Plus-R MINI, FAS-RCR to Ezi-MotionLink)

| Item        | Length[m] | Remark       |
|-------------|-----------|--------------|
| CGNA-R-0R6F | 0,6       | Normal Cable |
| CGNA-R-001F | 1         |              |
| CGNA-R-1R5F | 1,5       |              |
| CGNA-R-002F | 2         |              |
| CGNA-R-003F | 3         |              |
| CGNA-R-005F | 5         |              |

### ⑧ RS-232C Cable

| Item        | Length[m] | Remark       |
|-------------|-----------|--------------|
| CGNR-C-002F | 2         | Normal Cable |
| CGNR-C-003F | 3         |              |
| CGNR-C-005F | 5         |              |


### 3. Connector for Cabling

| ITEM                        | Specification | Marker                 |
|-----------------------------|---------------|------------------------|
| Signal Connector (CN1)      | Housing       | 501646-1600            |
|                             | Terminal      | 501648-1000(AWG 26~28) |
| Encoder Connector (CN2)     | Housing       | 501646-1000            |
|                             | Terminal      | 501648-1000(AWG 26~28) |
| Motor Connector (CN3)       | Housing       | PAP-04V-S              |
|                             | Terminal      | SPHD-001T-P0,5         |
| Power Connector (CN4)       | Housing       | PAP-02V-S              |
|                             | Terminal      | SPHD-001T-P0,5         |
| RS-485 Connector (CN5, CN6) | Housing       | 35507-0300             |
|                             | Terminal      | 50212-8100             |


\*These connectors are serviced together with Ezi-SERVO Plus-R MINI except when purchasing option cables.

\*Above connector is the most suitable product for Ezi-SERVO Plus-R MINI. Another equivalent connector can be used.

### ● External Wiring Diagram

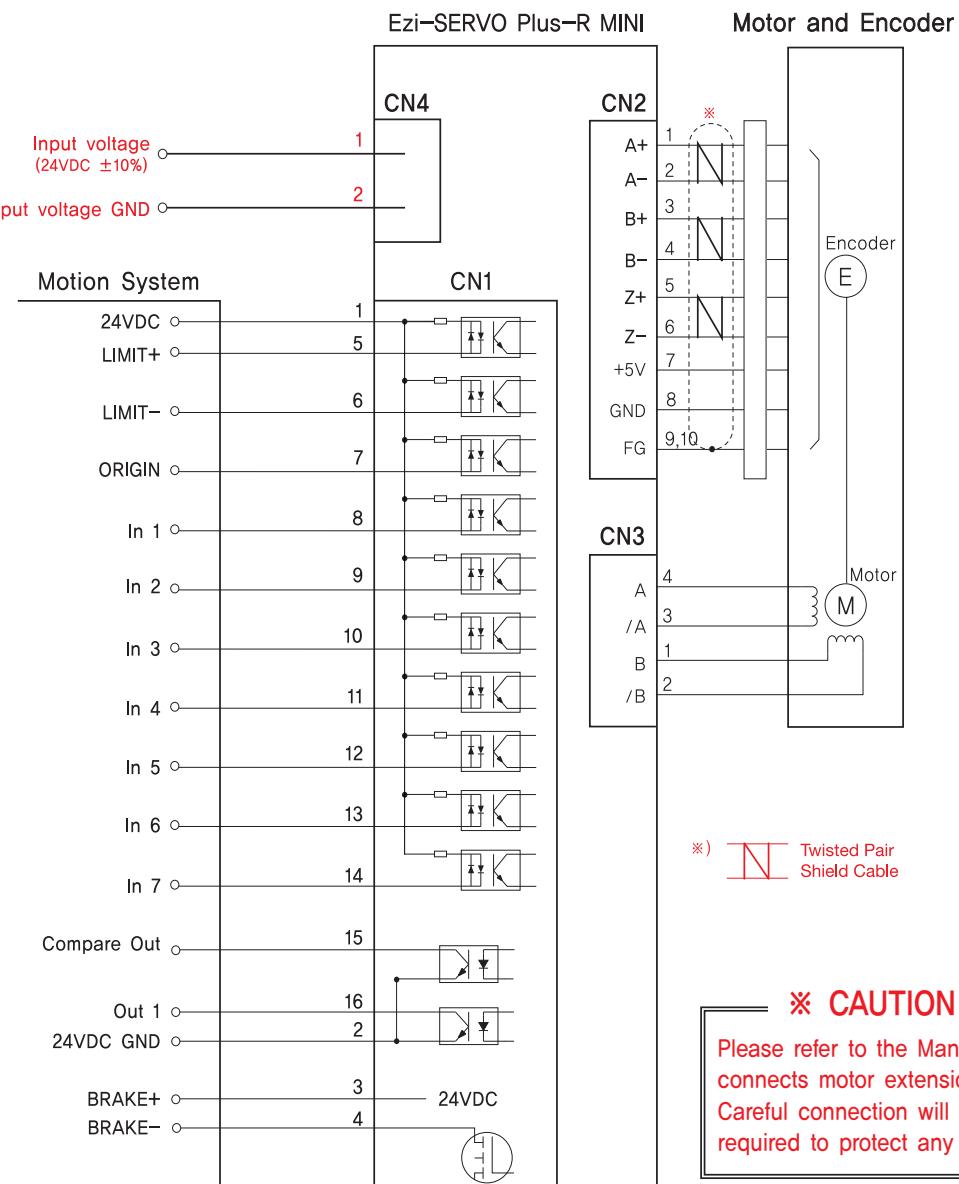

## ● GUI(Graphic User Interface) Screenshot

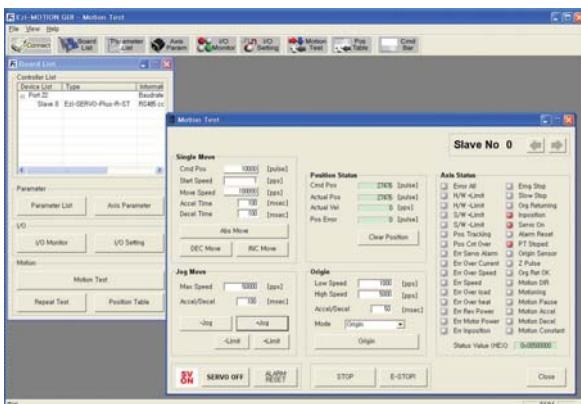



### ◆ Controller Lists and Motion Test

This screen display the controller list that connected to system. You can make a single move, jog and origin command and also the motor status is displayed.

| Slave No 0 |                       |         |            |            |
|------------|-----------------------|---------|------------|------------|
| Parameters |                       |         |            |            |
| No.        | Name                  | Unit    | Field      | Value      |
| 1          | Pulse Per Revolution  |         | 1-500000   | 500000     |
| 2          | Axis Max Speed        | [ppm]   | 1-500000   | 500000     |
| 3          | Axis Start Speed      | [ppm]   | 1-500000   | 1          |
| 4          | Axis Acc Time         | [msec]  | 1-9999     | 100        |
| 5          | Axis Dec Time         | [msec]  | 1-9999     | 100        |
| 6          | Speed Override        | [%]     | 1-500      | 100        |
| 7          | Axis Acc              | [ppm]   | 1-500000   | 500000     |
| 8          | Jog Start Speed       | [ppm]   | 1-500000   | 1          |
| 9          | Jog Acc Dec Time      | [msec]  | 1-9999     | 100        |
| 10         | Servo On Logic        |         | 0-1        | 0          |
| 11         | S/W Limit Plus Logic  |         | 0-1        | 0          |
| 12         | S/W Limit Plus Value  | [pulse] | ±134217727 | 134217727  |
| 13         | S/W Limit Minus Value | [pulse] | ±134217727 | -134217727 |
| 14         | Axis Position Set     |         | 0-1        | 0          |
| 15         | H/W Limit Stop Method |         | 0-1        | 1          |
| 16         | Limit Sensor Logic    |         | 0-1        | 0          |
| 17         | Limit Sensor Value    | [ppm]   | 1-1000000  | 500000     |
| 18         | Org Search Speed      | [ppm]   | 1-1000000  | 1000       |
| 19         | Org Acc Dec Time      | [msec]  | 1-9999     | 100        |
| 20         | Org Method            |         | 0-2        | 0          |
| 21         | Org Dir               |         | 0-1        | 0          |
| 22         | Org Offset            | [pulse] | ±134217727 | 0          |
| 23         | Org Position Set      | [pulse] | ±134217727 | 0          |
| 24         | Org Sensor Logic      |         | 0-1        | 0          |
| 25         | Org Sensor Gain       |         | 0-15       | 4          |
| 26         | Inpos Value           | [pulse] | 0-15       | 0          |
| 27         | Motion Tracking Limit |         | 0-1        | 0          |
| 28         | Motion Dir            |         | 0-1        | 0          |
| 29         | Limit Sensor Dir      |         | 0-1        | 1          |


### ◆ Parameter List

All of the parameters are displayed and modified on this screen.

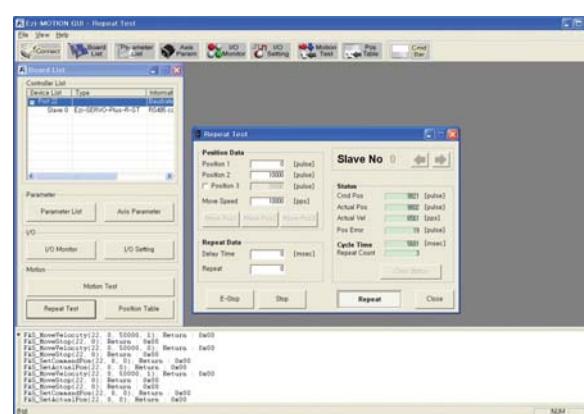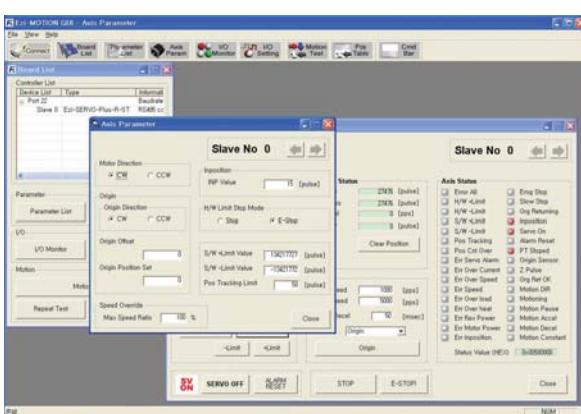

### ◆ Axis Parameter Setup

You can select various parameters that frequently used, (ex : sensor input logic)

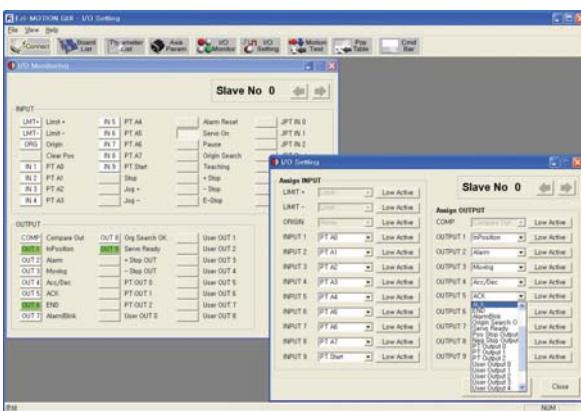

### ◆ I/O Monitoring and Setting

You can select various digital input and output signals of controller.

**MEMO**

# MEMO



*Fast, Accurate, Smooth Motion*

#### **FASTECH Co., Ltd.**

Rm #1202, Bucheon Technopark 401 Dong, Yakdea-dong,  
Wonmi-Gu, Bucheon-si, Gyeonggi-do, Rep. Of Korea (Zip)420-734  
TEL : 82-32-234-6300, 6301 FAX : 82-32-234-6302  
E-mail : fastech@fastech.co.kr Homepage : [www.fastech.co.kr](http://www.fastech.co.kr)

#### **FASTECH AMERICA LLC**

811 E Plano Parkway, Suite 110A, Plano, TX 75074 USA  
Toll Free: 877-905-4428 972-218-0210  
Email: [support@fastechamerica.com](mailto:support@fastechamerica.com)  
website: [www.fastechamerica.com](http://www.fastechamerica.com)