

# Servo amplifier

## mcDSA-E50-HC

Article number: 1513860

Certification:  \*1  
E475093



Picture similar

**Technical data**

<b>Absolute maximum rating (destruction limits)</b>		<b>Sensor supply (Encoder/Hall)</b>
Power supply voltage Up no polarity reversal protection	80 V	Output voltage 5 V
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Max. output current 0.2 A
Short term peak voltage < 1s Ue no polarity reversal protection	37 V	<b>Incremental encoder</b>
<b>Power</b>		Type incremental
Electronic supply voltage Ue	9..30 V	Signals A,B,Inx
Electronic current consumption@ Ue=24V*2	typ. 40 mA	Max. frequency (per channel) 100 kHz
Power supply voltage Up	9..60 V	Input voltage 0.5 V
Max. output current	25 A	Signal type open collector, single ended
Continuous output current @ Up=24V*3	14.5 A	<b>Hall sensors</b>
Continuous output current @ Up=48V*3	14.5 A	Signals H1,H2,H3
Continuous output current (certified UL)*4 @Up=24V	9.5 A	Max. frequency (per channel) 10 kHz
@Up=60V	9 A	Input voltage 0.5 V
<b>PWM</b>		Signal type open collector, single ended
Output voltage	90% Up	<b>Digital inputs</b>
PWM frequency	25, 32*5, 50 kHz	Number - digital inputs 8 (Din0..7)
<b>Mechanical</b>		Low voltage 0.5 V
Size LxWxH	87 x 74 x 29 mm	High voltage 8..30 V
Weight	150 g	<b>Digital outputs</b>
<b>Environment</b>		Number 4 (Dout0..3)
Protection class	IP20	Continuous output current (certified UL) 0.3 A
Ambient temperature (operation) (certified UL)	-40..40 °C	Continuous output current (not certified) 0.3 A
Ambient temperature (operation) (not certified)	-40..70 °C	Load Dout0..2 resistive, low inductive
Ambient temperature (storage)	-40..85 °C	Load Dout3 resistive, inductive
Rel. humidity (non-condensing)	5..90 %	Output voltage Electronic supply voltage Ue
<b>CAN bus</b>		Signal type positive switching
Protocol	DS301	<b>Analog inputs</b>
Device profile	DS402	Number 3 (Ain0..2)
Max. baudrate	1 Mbit/s	Signal type - Ain0..1 0..10 V, 12 Bit, single ended
CAN specification	2.0B	Signal type - Ain2 / PT1000 0..5 V, 12 Bit, single ended / PT1000
Galvanically isolated	no	

\*1 The certified performance data must be observed (see UL Instruction Note)

\*2 power amplifier switched off, 5V output (sensor supply) is free

\*3 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t &gt; 40 °C derating), RMS current: 14.5 A → 11.8 Aeff no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

\*4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C, I/O's and 5V output active, RMS current: 9.5 A → 7.8 Aeff, 9 A → 7.3 Aeff

\*5 default value

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2023 by miControl® - Modifications and errors excepted  
mcDSA-E50-HC - PV1.11.00.00 / DV1.00.00.05

Web: [www.miControl.de](http://www.miControl.de) e-mail: [info@miControl.de](mailto:info@miControl.de) Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

## Scheme

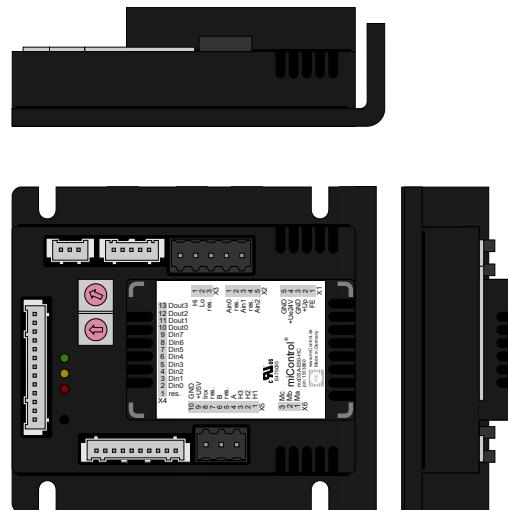

©2023 by miControl

## Terminal assignment

X1 Supply		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	+Ue24V	Electronic supply voltage
5	GND	Ground for electronic supply voltage
X2 Analog inputs		
1	Ain0	Analog input 0
2	res.	Reserved
3	Ain1	Analog input 1
4	res.	Reserved
5	Ain2	Analog Input 2 (5V) / PT1000
X3 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	res.	Reserved
X4 Digital inputs/outputs		
1	res.	Reserved
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	Din6	Digital input 6
9	Din7	Digital input 7
10	Dout0	Digital output 0
11	Dout1	Digital output 1
12	Dout2	Digital output 2
13	Dout3	Digital output 3

X5 Hall and inc. encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	res.	Reserved
6	B	Inc. encoder, B channel
7	res.	Reserved
8	Inx	Inc. encoder, index channel
9	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
10	GND	Ground for sensor supply Notice: don't connect with system GND
X6 Motor		
1	Ma	Motor phase A
2	Mb	Motor phase B
3	Mc	Motor phase C