

Servo amplifier

mcDSA-E27XC

Article number: 1512841

Certification:  *1

Technical data

Absolute maximum rating (destruction limits)		Sensor supply (Encoder)	
Power supply voltage Up no polarity reversal protection	80 V	Output voltage	5 V
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Max. output current	0.2 A
Short term peak voltage < 1s Ue no polarity reversal protection	37 V		
Power		Encoder	
Electronic supply voltage Ue	9..30 V	Type	sin / cos
Electronic current consumption @ Ue=24V*2	typ. 70 mA	Signals	+Sin,-Sin,+Cos,-Cos
Power supply voltage Up	9..60 V	Resolution	13 bit per sine period
Max. output current	160 A	Input voltage	1 V peak-peak, differential
Continuous output current (certified UL/CE)*3 @Up=24V	44 A	Signal type	sine/cosine, analog, differential
@Up=60V	40 A		
Continuous output current (not certified)*4 @Up=24V	60 A	Digital inputs	
@Up=48V	59 A	Number - digital inputs	6 (Din0..5)
with Heatsink (Art.No. 1511832)	70 A	Notice: Din5 parallel with Dout2*5	
Max. Output voltage	100% Up	Low voltage	0..5 V
PWM frequency	25, 32 ⁵ , 50 kHz	High voltage	8..30 V
Mechanical		Digital outputs	
Size LxWxH	111 x 100 x 40 mm	Number	3 (Dout0..2)
Weight	414 g	Notice: Dout2 parallel with Din5	
Environment		Continuous output current	1.5 A
Protection class	IP20	Load	resistive, inductive
Operating temperature*6	-40..55 °C	Output voltage	Electronic supply voltage Ue
Rel. humidity (non-condensing)	5..90 %	Signal type	positive switching
CAN bus		Analog inputs	
Protocol	DS301	Number	2 (Ain0..1)
Device profile	DS402	Signal type - Ain0	+/- 10 V, 12 Bit, differential
Max. baudrate	1 Mbit/s	Signal type - Ain1	+/- 10 V, 12 Bit, single ended
CAN specification	2.0B		
Galvanically isolated	yes		

*1 take into consideration the performance data

*2 power amplifier switched off, 5V output (sensor supply) is free, STO activ

*3 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (asymmetrical), ambient temperature 55 °C, I/O's and 5V output active, RMS current: 44 A → 36 Aeff, 40 A → 33 Aeff

*4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (asymmetrical), ambient temperature 40 °C, I/O's and 5V output free, RMS current: 60 A → 49 Aeff, 59 A → 48 Aeff, 70 A → 57 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*5 default value


*6 Hex-Switches should be not used at T < -25°C(setting of node ID only possible by firmware parameters)

*7 Input voltage must not exceed Electronic supply voltage Ue

Additional technical data are available in mcManual.

Chausseestraße 34
14979 Großbeeren (bei Berlin)Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

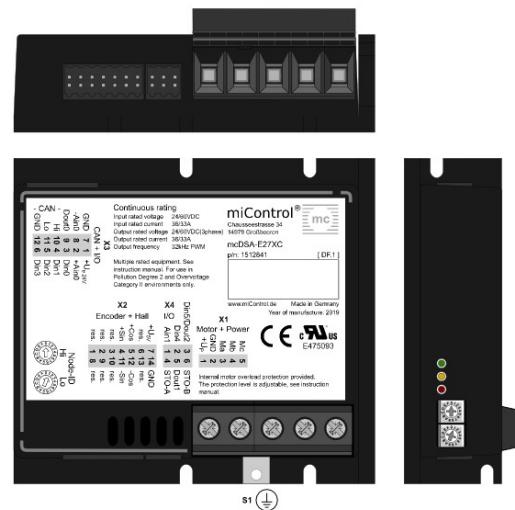

© 2011 by miControl

Terminal assignment

X1 Motor		
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
X2 Encoder		
1	res.	Reserved
2	res.	Reserved
3	res.	Reserved
4	+Sin	Encoder, plus sine signal
5	+Cos	Encoder, plus cosine signal
6	res.	Reserved
7	+U5V	5V output voltage for sensor supply Sensors: encoder
8	res.	Reserved
9	res.	Reserved
10	res.	Reserved
11	-Sin	Encoder, minus sine signal
12	-Cos	Encoder, minus cosine signal
13	res.	Reserved
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3 I/O's and CAN		
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground

X4	I/O's
1	Ain1
2	Din4
3	Din5/Dout2
4	STO-A
5	Dout1
6	STO-B
S1 Screw (M4)	
-	PE Protective earth connection