


Servo amplifier

mcDSA-E67-Modul

Article number: 1505038

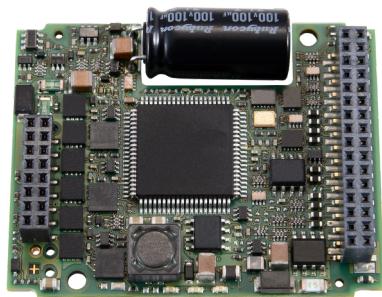

Picture similar

Technical data

Power	
Electronic supply voltage Ue	9..30 V
Electronic current consumption @ Ue=24V	typ. 45 mA
Power supply voltage Up	9..60 V
Max. output current	15 A
Continuous output current	5 A
Output voltage	100% Up
PWM frequency	25, 32*, 50 kHz
Min. load inductance	200 uH
Mechanical	
Size LxWxH	52.5 x 41 x 11 mm
Weight	18 g
Environment	
Protection class	IP00
Operating temperature	0..70 °C
Rel. humidity (non-condensing)	5..85 %
Encoder	
Type	sin / cos
Signals	+Sin,-Sin,+Cos,-Cos
Resolution	13 bit per sine period
Input voltage	1 V peak-peak, differential
Signal type	sine/cosine, analog, differential
Digital inputs	
Number	4 (Din0..3)
Low voltage	-10..5 V
High voltage	6..30 V
Notice	Din3 parallel with Dout1
Digital outputs	
Number	2 (Dout0..1)
Continous output current	1.5 A
Load	resistive, induktive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Notice	Dout1 parallel with Din3

Analog inputs

Number	2 (Ain0..1)
Signal type	+/- 10 V, 12 Bit, single ended
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no

* default value


Additional technical data are available in mcManual.



miControl® GmbH
Blankenfelder Chaussee 1
15831 Großbeeren (bei Berlin)

Copyright 2014 by miControl® - Modifications and errors excepted - V1.02.00.12
Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

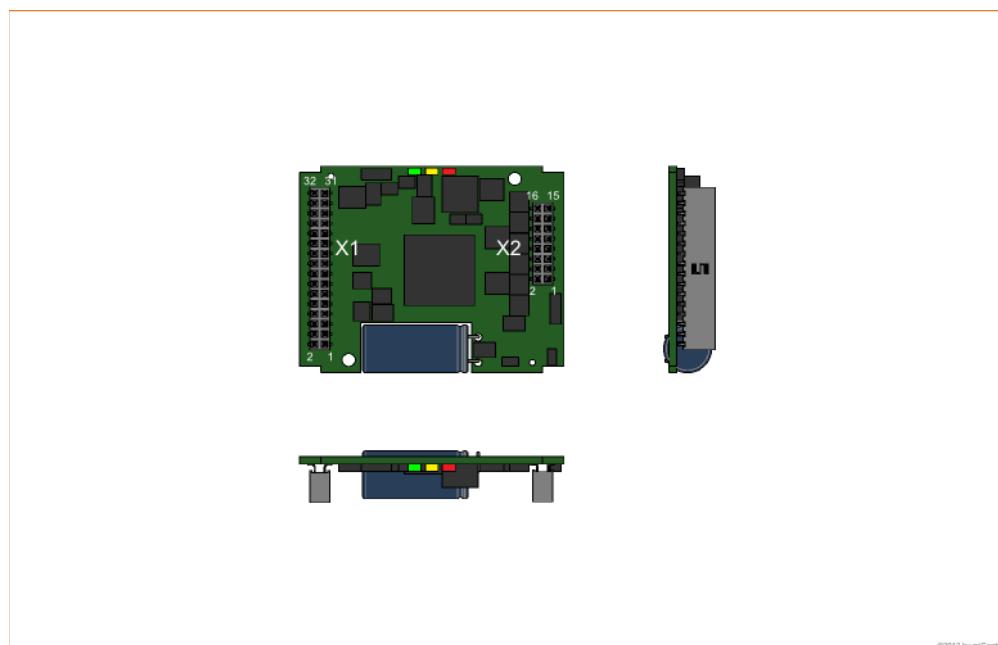

©2012 by miControl

Terminal assignment

X1	Hall, inc. encoder, I/O's and CAN
1	res.
2	Id7
3	+U5V
4	Id6
5	+Cos
6	Id5
7	+Sin
8	Id4
9	res.
10	Id3
11	-Cos
12	Id2
13	-Sin
14	Id1
15	CAN Lo
16	Id0
17	CAN Hi
18	Erw2
19	Dout0
20	Erw1
21	Din2
22	SpiSCK
23	Din1
24	SpiMOSI
25	Din0
26	Spi/SS
27	Ain0
28	SpiMISO
29	Ain1
30	Din3/Dout1
31	GND
32	res.

X2	Motor
1	+Up
2	res.
3	+Up
4	FE
5	GND
6	GND
7	Ma
8	+Ue
9	Ma
10	+Ue
11	Mb
12	Mb
13	Mc
14	res.
15	Mc
16	res.