

Servo amplifier

mcDSA-S45-RS232

Article number: 1505002 (HC Version 1505008)

Technical data

Power	
Electronic supply voltage Ue	9..30 V
Electronic current consumption @ Ue=24V (Bus not connected)	typ. 65 mA
Power supply voltage Up	9..60 V
Max. output current	20 A
Output voltage	85% Up
PWM frequency	25, 32, 50* kHz
Min. load inductance	200 µH
Mechanical	
Size LxWxH (HC Version)	110 x 45(62) x 77 mm
Weight (HC Version)	170 (370) g
Environment	
Protection class	IP20
Operating temperature	0..70 °C
Rel. humidity (non-condensing)	5..85 %
Incremental encoder	
Type	incremental
Signals	A, /A, B, /B, Inx, /Inx
Max. frequency (per channel)	500 kHz
Input voltage (24V tolerant)	5 V
Signal type	differential, open collector, single ended
Digital inputs	
Number	8 (Din0..7)
Low voltage	-30..5 V
High voltage	8..30 V
Digital outputs	
Number	2 (Dout0..1)
Continuous output current	2.5 A
Load	resistive, induktive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Analog inputs	
Number	1 (Ain0)


* default value

Additional technical data are available in mcManual.

Signal type	+/- 10 V, 12 Bit, differential
Number	1 (Ain1)
Signal type	+/- 10 V, 12 Bit, single ended
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no
RS232	
Type	Data Communication Equipment (DCE)
Physical layer	RS232
Baudrate	9600 bit/s



Scheme

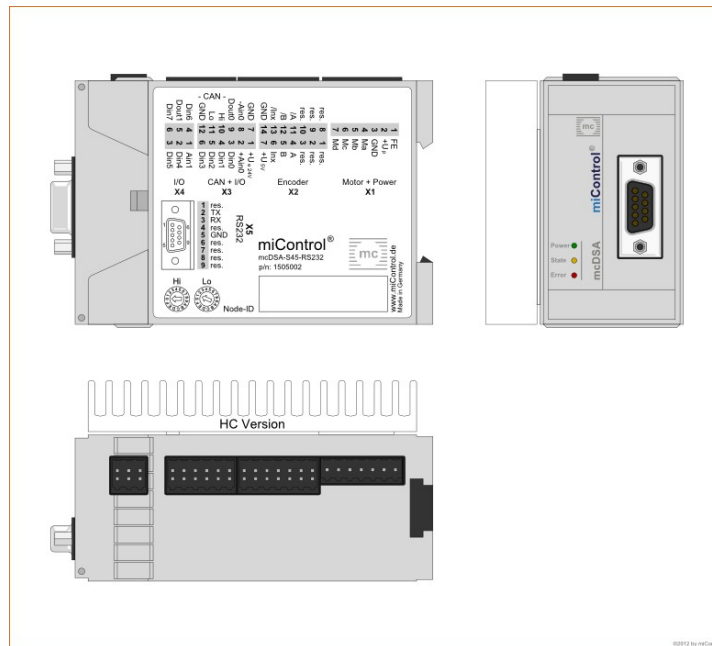

Terminal assignment

X1 Motor		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	Ma	Motor phase A
5	Mb	Motor phase B
6	Mc	Motor phase C
7	Md	Motor phase D
X2 Inc. encoder		
1	res.	Reserved
2	res.	Reserved
3	res.	Reserved
4	A	Inc. encoder, A channel
5	B	Inc. encoder, B channel
6	Inx	Inc. encoder, index channel
7	+U5V	5V auxiliary voltage (encoder)
8	res.	Reserved
9	res.	Reserved
10	res.	Reserved
11	/A	Inc. encoder, A channel inverted
12	/B	Inc. encoder, B channel inverted
13	/Inx	Inc. encoder, index channel inverted
14	GND	Ground for 5V auxiliary voltage (encoder)

X3 I/O's and CAN		
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground
X4 I/O's		
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5	Digital input 5
4	Din6	Digital input 6
5	Dout1	Digital output 1
6	Din7	Digital input 7
X5 RS232		
1	res.	Reserved
2	TX	Transmit Signal
3	RX	Receive Signal
4	res.	Reserved
5	GND	Ground
6	res.	Reserved
7	res.	Reserved
8	res.	Reserved
9	res.	Reserved