

DCmind: BRUSHLESS MOTORS

Motors 34 to 192 W nominal output power range SMi21

- > Servomotor for position, speed and torque control applications
- > Very high power density
- > Built-in electronics with 6 inputs (2 of which are analog) and 4 outputs
- > Built-in 4096-pulse encoder
- > With application programs already debugged and saved in the motor
- > Expert programs can be used to adapt to the requirements of difficult applications
- > Parameters set on the PC via USB connection
- > Integrated bootloader for embedding special customer firmware



Parts number

	34 to 94 W			40 to 145 W			82 to 192 W		
Type	80140 SMi21			80180 SMi21			80280 SMi21		
Part numbers									
IP65 option	80140043			80180044			80280001		
Holding torque brake 0.5 Nm option	80140044			80180045			80280002		
Nominal operating range (V _{DC})	12 - 48			12 - 48			12 - 48		
Min. max. operating range (V _{DC})	9 - 56			9 - 56			9 - 56		
No-load characteristics	12 V _{DC}	24 V _{DC}	48 V _{DC}	12 V _{DC}	24 V _{DC}	48 V _{DC}	12 V _{DC}	24 V _{DC}	48 V _{DC}
Speed of rotation (rpm)	2400	4000	4000	1700	3500	4000	1500	3050	4000
Absorbed current (A)	0.3	0.3	0.2	0.3	0.33	0.2	0.38	0.44	0.35
Nominal characteristics	12 V _{DC}	24 V _{DC}	48 V _{DC}	12 V _{DC}	24 V _{DC}	48 V _{DC}	12 V _{DC}	24 V _{DC}	48 V _{DC}
Speed (rpm)	1460	3900	4000	1100	2900	4000	1100	2863	4000
Torque (mNm)	225	225	225	350	350	350	685	565	460
Absorbed current (A)	5.2	5.2	2.6	5.65	5.40	3.65	10	8	5
Output power (W)	34	92	94	40	105	145	82	170	192
Maximal characteristics	12 V _{DC}	24 V _{DC}	48 V _{DC}	12 V _{DC}	24 V _{DC}	48 V _{DC}	12 V _{DC}	24 V _{DC}	48 V _{DC}
Speed of rotation (rpm)	1100	3000	4000	1000	2400	4000	740	2250	4000
Torque (mNm)	300	400	440	400	600	750	1000	1000	1000
Absorbed current (A)	7	9.5	6.1	6.4	10	10.1	14	14	11.5
Output power (W)	34	125	184	42	151	314	77	235	419
General characteristics									
Rotor inertia (gcm ²)	75			115			120		
Number of rotor poles	4			4			8		
Ambient operating temperature (°C)	-30 → +70			-30 → +70			-30 → +70		
Service life (h)	20000			20000			20000		
Ball bearing	✓			✓			✓		
Weight (kg)	1.17			1.52			1.62		
Integrated software									
Applications software	✓			✓			✓		
Positioning mode	✓			✓			✓		
Speed mode	✓			✓			✓		
Torque mode	✓			✓			✓		
Inputs / Outputs									
Analog inputs (PWM and 0-10 V)	2			2			2		
Digital inputs	4			4			4		
(PWM) output	2			2			2		
Digital output	2			2			2		
IP54 over the whole motor apart from the shaft output. Versions with brake are IP20									
Accessory									
Starter kit, DCmind soft program and USB cable							79298008		


Product adaptations




- > Other specific applications software
- > Specific PC interface
- > Special cable length
- > Special shaft
- > Other connectors

Curves


Speed / Torque 80140 SMi21- Current / Torque 80140 SMi21

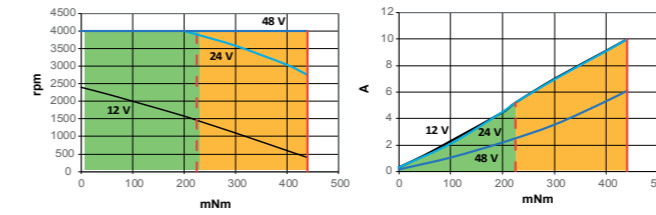

Speed / Torque 80180 SMi21 - Current / Torque 80180 SMi21

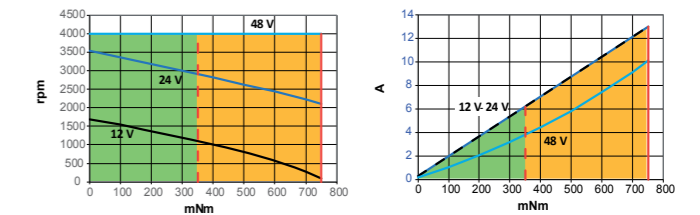


Speed / Torque 80280 SMi21- Current / Torque 80280 SMi21

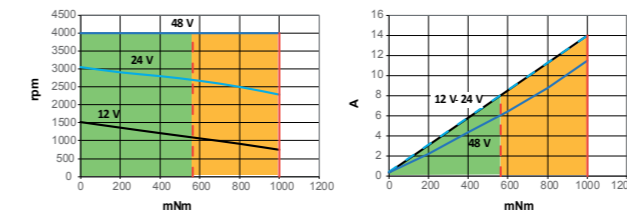

- Continuous running area
- Cycling running area
- Maximum continuous torque
- Maximum peak torque

Dimensions (mm)

80140 - 80180 - 80280 SMi21

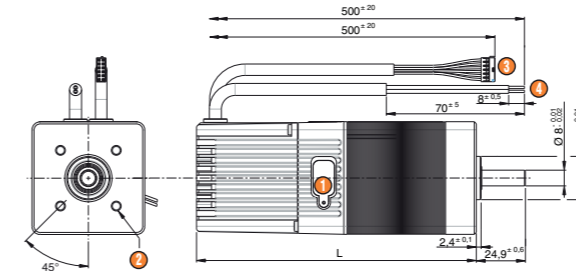


- USB connection type A or B
- 4 x M5 over Ø 40 depth 4.5
- Command cable 12 x AWG26
- Power cable 2 x AWG16

L: 80140: 123 max
L: 80180 / 80280: 143 max

More information: see page 16

Connection

Connector (Molex 0430251200)

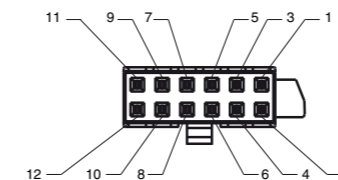

Pin	Logic cable		Power cable	
	Description	Wires color	Description	Wires color
1	Input 1 - logic	Green	+12 V _{DC} → 48 V _{DC}	Brown
2	Input 2 - logic	Yellow	0 V _{DC}	Blue
3	Input 3 - logic	White		
4	Input 4 - logic	White-brown		
5	Input 5 - analog	Blue		
6	Input 6 - analog	Orange		
7	0 V _{DC}	Black		
8	0 V _{DC}	White-black		
9	Output 1 - PWM	Brown		
10	Output 2 - PWM	Purple		
11	Output 3 - logic	Red		
12	Output 4 - logic	Grey		

User information

Notice available on website, please read it before use.

GEARBOXES FOR DCmind BRUHLESS RANGE

4 to 120 Nm

- › Planetary and worm gearboxes
- › Shafts on ball bearings
- › Long service life
- › IP65



Gearboxes	Planetary Ø 52			Planetary Ø 62			Planetary Ø 81			Worm
Type	810495			810496			810497			810410
Associated motors	Part number			Part number			Part number			Part number
80140 TNi21	801495 TNi21			801496 TNi21			801897 TNi21			801410 TNi21
80180 TNi21				801896 TNi21			802897 TNi21			801810 TNi21
80280 TNi21										802810 TNi21
80140 SMi21	801495 SMi21			801496 SMi21			801897 SMi21			801410 SMi21
80180 SMi21				801896 SMi21			802897 SMi21			801810 SMi21
80280 SMi21										802810 SMi21
Gearbox characteristics										
Number of stages	1	2	3	1	2	3	1	2	3	1
Maximum permitted torque (Nm)	4	12	25	8	25	50	20	60	120	10
Efficiency	0.8	0.75	0.7	0.9	0.8	0.7	0.9	0.8	0.7	0.6 → 0.3
Axial dynamic load (daN)	6	10	15	7	10	15	8	12	20	10
Radial dynamic load (daN)	20	32	45	24	36	52	40	60	100	15
Operating temperature	-20 → +70°C			-20 → +70°C			-20 → +70°C			-20 → +70°C
Weight (kg)	0.7	0.8	1.1	0.8	1.2	1.6	1.8	2.5	3.2	0.7
Standard reduction ratios	6.75	25 46	93 169 308	5.16 6.75	19 27 46	100 139 236 308	5	19 27	100 139 236	5 - 10 - 20 - 30 - 50
Other ratios possible										15 - 100

Comments

- › **Ø 52 planetary gearbox:** Metal gears on all stages. IP65 apart from the output shaft.
 - › **Ø 62 planetary gearbox:** On the first stage, the planet gears are made of composite materials which improve efficiency and service life. On the other stages, the metal gears turn on needle bearings. IP65 apart from the output shaft.
 - › **Ø 81 planetary gearbox:** All gears are metal and turn on needle bearings, resulting in excellent robustness and a very long service life. IP65 apart from the output shaft.
 - › **Worm gearbox:** This gearbox combines a tempered steel worm and a hard bronze helical gear wheel, thus ensuring a long service life. The wheel is coated with grease, ensuring an excellent slip coefficient and good heat dissipation. O-rings and lipseals are used in combination with a compression spring to create a tight seal at the gearbox output shaft and the motor input shaft. IP65 gearbox.
- The casing is made of aluminium to maximise heat exchanges with its supporting surface on the machine. However, due to the high power that can be transmitted by this gearbox and the low efficiency inherent in large worm gearbox reduction ratios, make sure that the gearbox casing temperature does not exceed 75°C during operation.
- The output shaft can be placed on the right or left, or can be a double shaft (shaft output on both sides).

Made to order products, available on request

- › Special shafts
- › Other reduction ratios
- › Other fixing holes
- › Special mounting flange