



# STANDARD TYPE S9D SERIES [60~120W]

## MOTOR DIMENSION

UNIT : mm[inch]

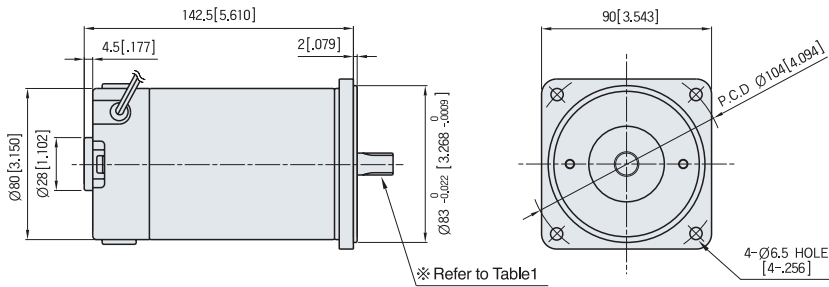

## CHARACTERISTIC CURVE

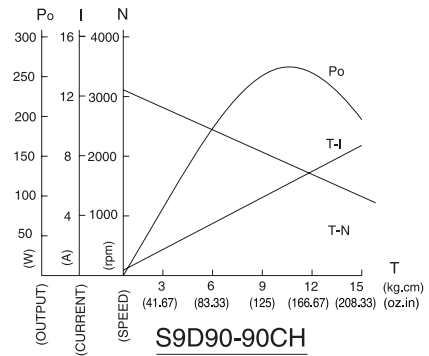


### SPEC for output shaft of motor-(Table 1)

MODEL	GEARED TYPE	STRAIGHT TYPE	D-CUT TYPE	KEY TYPE
	S9D60- CH S9D90- CH S9D120- CH	S9D60- S S9D90- S S9D120- S	S9D60- D S9D90- D S9D120- D	S9D60- K S9D90- K S9D120- K

GEARED TYPE	STRAIGHT TYPE	D-CUT TYPE	KEY TYPE

## CIRCUIT DIAGRAM

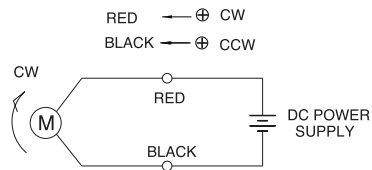

The direction of motor rotation is as viewed from the front shaft end of the motor

## MOTOR SPECIFICATION

( Voltage : DC 24V )

Type	Voltage V	Output W	No Load		At Rated Load			Run Duty Hr	Weight Kg	
			Speed RPM	Current(MAX.) A	Speed RPM	Torque				Current A
						N-m	oz-in			
S9D60-12□	12	60	3000	2.5	2650	0.216	N-m	7.9	2000	2.2
						30.5	oz-in			
						2.20	kgf cm			
S9D60-24□	24	60	3000	1.2	2800	0.206	N-m	3.6	2000	2.2
						29.1	oz-in			
						2.10	kgf cm			
S9D60-90□	90	60	3100	0.3	2900	0.196	N-m	1.0	2000	2.2
						27.8	oz-in			
						2.00	kgf cm			
S9D90-12□	12	90	3100	3.0	2750	0.314	N-m	10.5	2000	2.2
						44.4	oz-in			
						3.20	kgf cm			
S9D90-24□	24	90	3250	2.4	2920	0.304	N-m	5.6	2000	2.2
						43.0	oz-in			
						3.10	kgf cm			
S9D90-90□	90	90	3100	0.3	2800	0.314	N-m	1.4	2000	2.2
						44.4	oz-in			
						3.20	kgf cm			
S9D120-12□	12	120	3300	3.5	2800	0.412	N-m	14.9	2000	2.2
						58.3	oz-in			
						4.20	kgf cm			
S9D120-24□	24	120	3300	2.0	2920	0.392	N-m	7.1	2000	2.2
						55.5	oz-in			
						4.00	kgf cm			
S9D120-90□	90	120	3000	0.3	2600	0.441	N-m	2.0	2000	2.2
						62.4	oz-in			
						4.50	kgf cm			

※ Run duty is valued at rated Voltage and No load


# GEARED MOTOR SPECIFICATION

UNIT : mm[inch]

GEARED MOTOR ※ MOTOR MODEL : S9D60- CH, S9D90- CH, S9D120- CH  
 ※ HEAD MODEL : S9 C3B -S~S9 C200B -S

## INTER-DECIMAL GEAR HEAD

※ MODEL : S9GX10B(H,L)-S

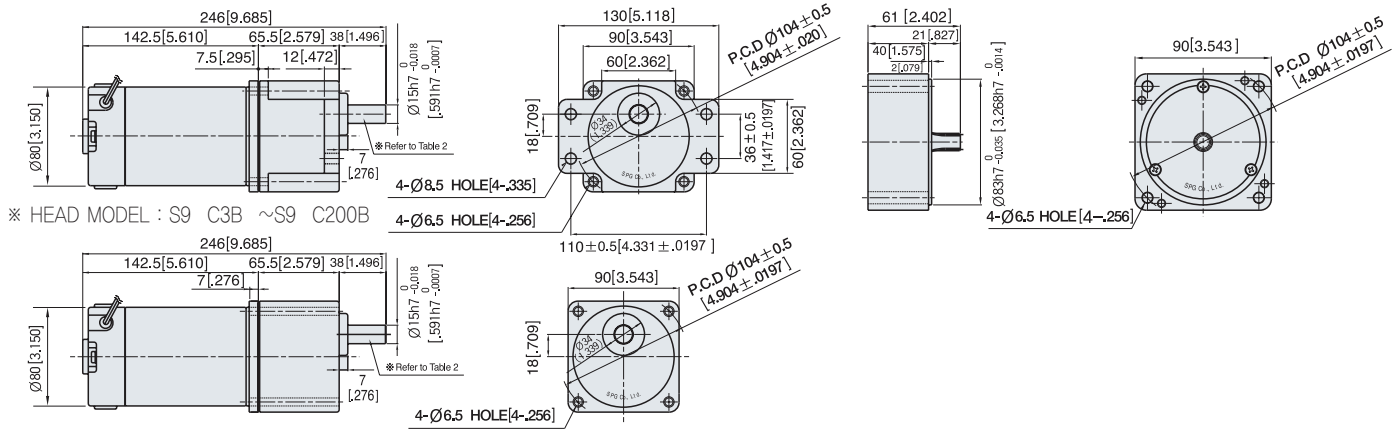

30(40) – (Table1)

SPEC for output shaft of gearhead-(Table 2)

KEY SPEC

PART	WEIGHT:kg(oz)	
MOTOR	2.2(77.6)	
DECIMAL GEAR HEAD	0.65(22.9)	
GEAR HEAD	S9 C3B ~S9 C10B	1.21(42.7)
	S9 C12.5B ~S9 C20B	1.30(45.9)
	S9 C25B ~S9 C60B	1.40(49.4)
	S9 C75B ~S9 C200B	1.45(51.1)

MODEL	
STRAIGHT TYPE	
S9SB3 ~S9SB200	
D-CUT TYPE	
S9DB3 ~S9DB200	
KEY TYPE	
S9KB3 ~S9KB200	

GEAR HEAD	MOTOR

# GEAR HEAD RATED LOAD

## S9D60-90CH

MODEL	GEAR RATIO	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
S9KC□ B□ S9KC□ B□-S	No Load rpm	1033	861	620	517	413	344	310	248	207	172	155	124	103	86	78	62	52	41	34	31	26	21	17	16
	N-m	0.48	0.57	0.79	0.95	1.19	1.43	1.59	1.79	2.14	2.57	2.86	3.21	3.86	4.63	5.14	6.43	7.72	8.68	10.42	11.57	13.89	17.36	19.60	19.60
	oz-in	67.4	80.9	112.4	134.9	168.6	202.3	224.8	252.9	303.5	364.2	404.6	455.2	546.3	655.5	728.4	910.5	1092.5	1229.1	1474.9	1638.8	1966.6	2458.2	2775.4	2775.4
	kgf·cm	4.9	5.8	8.1	9.7	12.2	14.6	16.2	18.2	21.9	26.2	29.2	32.8	39.4	47.2	52.5	65.6	78.7	88.6	106.3	118.1	141.7	177.1	200.0	200.0

## S9D90-90CH

MODEL	GEAR RATIO	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
S9KC□ B□ S9KC□ B□-S	No Load rpm	1033	861	620	517	413	344	310	248	207	172	155	124	103	86	78	62	52	41	34	31	26	21	17	16
	N-m	0.76	0.91	1.27	1.52	1.91	2.29	2.54	2.86	3.43	4.12	4.57	5.14	6.17	7.41	8.23	10.29	12.35	13.89	16.67	18.52	19.60	19.60	19.60	19.60
	oz-in	107.9	129.5	179.8	215.8	269.8	323.7	359.7	404.6	485.6	582.7	647.4	728.4	874.0	1048.8	1165.4	1456.7	1748.1	1966.6	2359.9	2622.1	2775.4	2775.4	2775.4	2775.4
	kgf·cm	7.8	9.3	13.0	15.6	19.4	23.3	25.9	29.2	35.0	42.0	46.7	52.5	63.0	75.6	84.0	105.0	126.0	141.7	170.1	189.0	200.0	200.0	200.0	200.0

## S9D120-90CH


MODEL	GEAR RATIO	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
S9KC□ BH S9KC□ BH-S	No Load rpm	1000	833	600	500	400	333	300	240	200	167	150	120	100	83	75	60	50	40	33	30	25	20	17	15
	N-m	1.07	1.29	1.79	2.14	2.68	3.21	3.57	4.02	4.82	5.79	6.43	7.23	8.68	10.42	11.57	14.47	17.36	19.53	19.60	19.60	19.60	19.60	19.60	19.60
	oz-in	151.7	182.1	252.9	303.5	379.4	455.2	505.8	569.0	682.8	819.4	910.5	1024.3	1229.1	1474.9	1638.8	2048.5	2458.2	2765.5	2775.4	2775.4	2775.4	2775.4	2775.4	2775.4
	kgf·cm	10.9	13.1	18.2	21.9	27.3	32.8	36.5	41.0	49.2	59.0	65.6	73.8	88.6	106.3	118.1	147.6	177.1	199.3	200.0	200.0	200.0	200.0	200.0	200.0

- The code in ■ of gearhead model is for gear ratio
- It is the permissible torque of the assembled motor and gearhead  
 The permissible torque of the combination of the regular gearhead and the inter-decimal gearhead is 30 f .
- color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor.  
 Others indicate rotation in the opposite direction.
- No Load rpm equals Motor no load rpm divided by gear ratio. The actual rotation speed is less 2-20% than the displayed value according to the load
- There is no marked the L code for it is an exclusive use.

# GEARED MOTOR SPECIFICATION

UNIT : mm[inch]

GEARED MOTOR ※ MOTOR MODEL : S9D60- CH, S9D90- CH, S9D120- CH  
 ※ HEAD MODEL : S9 D3B~S9 D200B

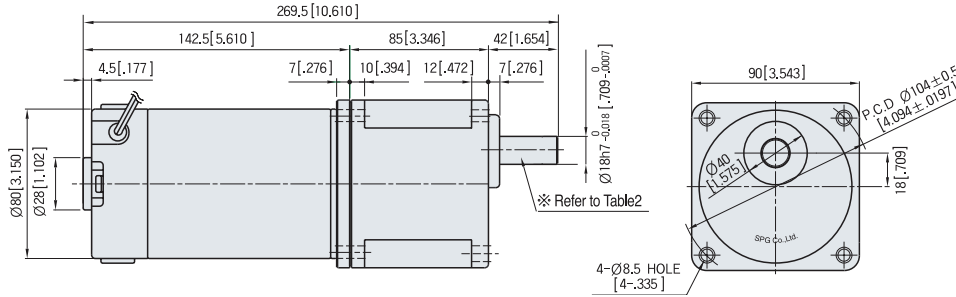

30(40) – (Table1)

PART		WEIGHT:kg(oz)
MOTOR		2.2(77.6)
GEAR HEAD	S9 D3B ~S9 D10B	1.65(58.2)
	S9 D12.5B ~S9 D20B	1.80(63.5)
	S9 D25B ~S9 D60B	1.90(67.0)
	S9 D75B ~S9 D200B	1.95(68.8)

SPEC for output shaft of gearhead-(Table2)

MODEL	
STRAIGHT TYPE	
D-CUT TYPE	
KEY TYPE	

KEY SPEC

GEAR HEAD	MOTOR

## GEAR HEAD RATED LOAD

### S9D60-90CH

MODEL	GEAR RATIO	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
S9KD□ B	No Load rpm	1033	861	620	517	413	344	310	248	207	172	155	124	103	86	78	62	52	41	34	31	26	21	17	16
	N·m	0.48	0.57	0.79	0.95	1.19	1.43	1.59	1.79	2.14	2.57	2.86	3.21	3.86	4.63	5.14	6.43	7.72	8.68	10.42	11.57	13.89	17.36	20.83	23.15
	oz·in	67.4	80.9	112.4	134.9	168.6	202.3	224.8	252.9	303.5	364.2	404.6	455.2	546.3	655.5	728.4	910.5	1092.5	1229.1	1474.9	1638.8	1966.6	2458.2	2949.9	3277.6
	kgf·cm	4.9	5.8	8.1	9.7	12.2	14.6	16.2	18.2	21.9	26.2	29.2	32.8	39.4	47.2	52.5	65.6	78.7	88.6	106.3	118.1	141.7	177.1	212.6	236.2

### S9D90-90CH

MODEL	GEAR RATIO	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
S9KD□ B	No Load rpm	1033	861	620	517	413	344	310	248	207	172	155	124	103	86	78	62	52	41	34	31	26	21	17	16
	N·m	0.76	0.91	1.27	1.52	1.91	2.29	2.54	2.86	3.43	4.12	4.57	5.14	6.17	7.41	8.23	10.29	12.35	13.89	16.67	18.52	22.22	27.78	29.40	29.40
	oz·in	107.9	129.5	179.8	215.8	269.8	323.7	359.7	404.6	485.6	582.7	647.4	728.4	874.0	1048.8	1165.4	1456.7	1748.1	1966.6	2359.9	2622.1	3146.5	3933.2	4163.0	4163.0
	kgf·cm	7.8	9.3	13.0	15.6	19.4	23.3	25.9	29.2	35.0	42.0	46.7	52.5	63.0	75.6	84.0	105.0	126.0	141.7	170.1	189.0	226.7	283.4	300.0	300.0

### S9D120-90CH

MODEL	GEAR RATIO	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
S9KD□ B	No Load rpm	1000	833	600	500	400	333	300	240	200	167	150	120	100	83	75	60	50	40	33	30	25	20	17	15
	N·m	1.07	1.29	1.79	2.14	2.68	3.21	3.57	4.02	4.82	5.79	6.43	7.23	8.68	10.42	11.57	14.47	17.36	19.53	23.44	26.04	29.40	29.40	29.40	29.40
	oz·in	151.7	182.1	252.9	303.5	379.4	455.2	505.8	569.0	682.8	819.4	910.5	1024.3	1229.1	1474.9	1638.8	2048.5	2458.2	2765.5	3318.6	3687.4	4163.0	4163.0	4163.0	4163.0
	kgf·cm	10.9	13.1	18.2	21.9	27.3	32.8	36.5	41.0	49.2	59.0	65.6	73.8	88.6	106.3	118.1	147.6	177.1	199.3	239.1	265.7	300.0	300.0	300.0	300.0

- The code in ■ of gearhead model is for gear ratio
- It is the permissible torque of the assembled motor and gearhead  
 The permissible torque of the combination of the regular gearhead and the inter-decimal gearhead is 30 f · .
- ■ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor.  
 Others indicate rotation in the opposite direction.
- No Load rpm equals Motor no load rpm divided by gear ratio. The actual rotation speed is less 2-20% than the displayed value according to the load
- There is no marked the L code for it is an exclusive use.