


# IG-32PHGM

## 41 & 42 TYPE



### 外形尺寸/ Appearance Size

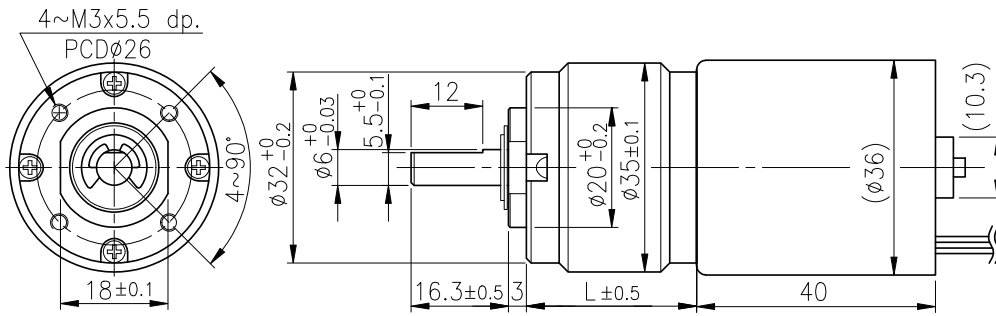

unit:mm

### 齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

減速比 Reduction ratio	1/13	1/18	1/25	1/48	1/68	1/94	1/132	1/180	1/250	1/349	1/491	1/683						
12V 定格扭力 Rated torque (Kg-cm)	1.8	2.5	3.5	5.8	8	10	10	12	12	12	12	12						
12V 定格轉數 Rated speed (rpm)	150	109	75	41	29.5	21.5	15.5	12	8.4	6.5	4.4	3.3						
24V 定格扭力 Rated torque (Kg-cm)	2.2	3.1	4.4	7.2	8	10	10	12	12	12	12	12						
24V 定格轉數 Rated speed (rpm)	295	210	150	80	58	41.5	30	23	16.3	12	8.4	6.1						
軸心迴轉方向 Rotation direction	CW																	
長度 Length (L)	28.5		34.9				41.3											

### 馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	200	2000	≤ 1000	2800	≤ 350	4.1	145
24	250	3900	≤ 1230	5000	≤ 400	10	145

### 馬達單體特性/ Motor Characteristics

