


RA-37GM

07&09 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/6	21.8	1/219~1/625	32.0
1/16~1/21	24.6	1/750~1/1875	34.5
1/31~1/69	27.1	1/2813~1/5625	37.0
1/75~1/188	29.5		

外形尺寸 APPEARANCE SIZE

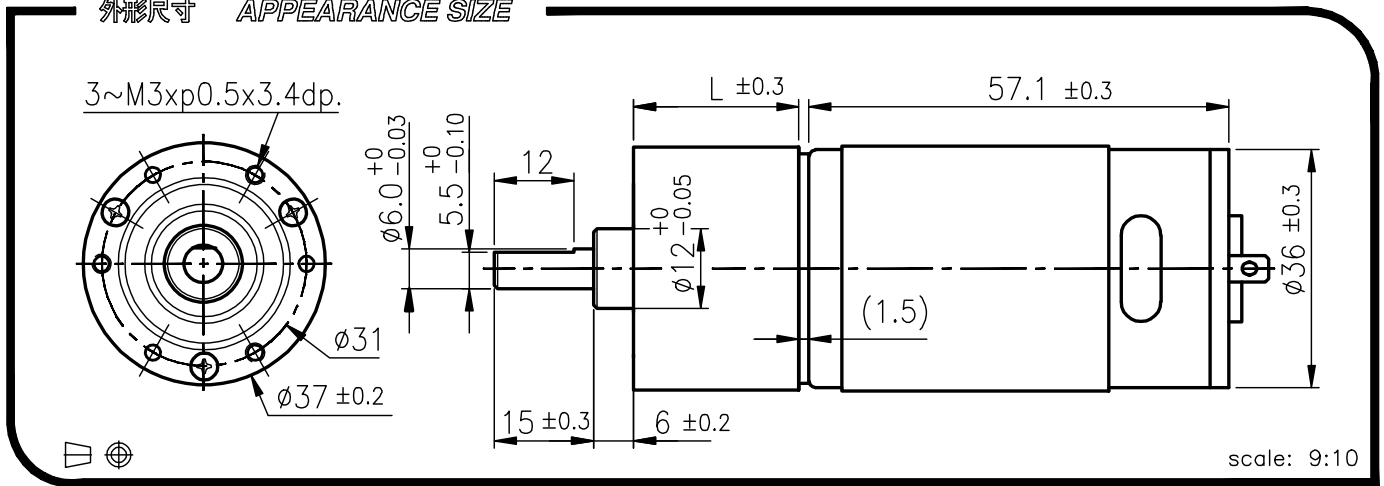

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/6	1/16	1/21	1/31	1/56	1/75	1/104	1/125	1/156	1/188	1/219	1/250	1/312	1/469	1/625	1/750	1/938	1/1875	1/3750	1/5625	
		12V	1.0	2.0	2.0	3.0	4.0	5.0	5.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
	定格扭力(Kg-cm) Rated torque	1.0	2.0	2.0	3.0	4.0	5.0	5.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
	定格回轉數(rpm) Rated speed	795	330	250	172	95	72	54	45	37	31	26	23	18.7	12.5	9.3	7.8	6.2	3.2	1.5	1.0	
24V	1.0	2.0	2.0	3.0	4.0	5.0	5.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
	定格回轉數(rpm) Rated speed	805	338	260	175	97	73	55	46	38	32	26.8	23.4	18.8	12.5	9.5	7.8	6.3	3.2	1.6	1.0	

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	250	4930	≤ 1600	6000	≤ 250	12.80	220
24	240	5150	≤ 750	6000	≤ 130	12.70	220

馬達單體特性圖 / MOTOR CHARACTERISTICS

